

PRODUCT CATALOG



Quality HVAC Solutions
Since 1989



FAMCOMFG.COM

ROOF VENTS | WALL VENTS | GABLE VENTS | SOFFIT/FOUNDATION VENTS | HVAC DAMPERS |
CHIMNEY CAPS | PIPE FLASHINGS | HVAC ACCESSORIES | ROOF FLASHINGS |



ABOUT US

Welcome to Fresh Air Manufacturing (FAMCO®), where innovation meets unparalleled, high-quality craftsmanship. At FAMCO®, we are not just a company; we are a dedicated team committed to redefining standards in the building materials industry.

THE POWER OF TEAMWORK

Since our founding in Idaho in 1989, our philosophy has centered around the belief that our greatest asset is the strength of our team. We understand that when our team is united, focused, and collaborative, we achieve greatness. FAMCO® is not just a collection of individuals; we are a family working in harmony to contribute our unique talents to deliver excellence. From our skilled craftsmen to our forward-thinking designers, every member of the FAMCO® team plays a crucial role in our shared success.

CUSTOMER-CENTRIC APPROACH

FAMCO® believes in a simple yet powerful principle: we win when our customers win. Your satisfaction is our goal, and we go above and beyond to ensure that every product we create exceeds your expectations. We listen, we adapt, and we innovate to meet your unique needs. Your success is our success, and we take pride in being a company that truly values and prioritizes customer satisfaction.

PUTTING SERVICE FIRST

Short lead-times, responding quickly to inquiries and going the extra mile for our customers are not remarkable events but what we do daily. Our goal is to ship all products, large or small, within 5 days of receiving the order. Your unique challenges become opportunities for us to showcase our expertise and deliver solutions that go beyond expectations.

FUTURE-FOCUSED

FAMCO® is not just about the present; we are invested in the future. We embrace change, innovation, and technological advancements to stay ahead of the curve. Our commitment to continuous improvement ensures that we are always at the forefront of industry trends, providing you with cutting-edge solutions that stand the test of time.

Join us on a journey where every breath of fresh air is a testament to the dedication, passion, and expertise of the FAMCO® team. Your success is our success, and at FAMCO®, we're not just crafting products; we're crafting experiences that last a lifetime.

ESTABLISHED IN 1989







VISION

TO BUILD AN EMPOWERED TEAM DEDICATED TO MAKING FAMCO® THE NATION'S #1 CHOICE OF VENTILATION SOLUTIONS.

MISSION

CUSTOMERS TRUST FAMCO® TO DELIVER UNPARALLELED QUALITY AND LEAD TIMES IN THE HVAC MARKET. WE PURSUE A VIBRANT FUTURE, DRIVEN BY EMPOWERED INDIVIDUALS WORKING AS A TEAM, COMMITTED EACH DAY TO CONTINUOUS IMPROVEMENT.

FAMCO® FAMILY VALUES

WE BELIEVE THE STRENGTH OF OUR TEAM IS OUR GREATEST ADVANTAGE

Each of us has the capacity to lead and inspire others through our actions

We invest in our success through training, development and providing opportunity

We are inspired to contribute our gifts and talents, have a bias for action, and are accountable for the outcome

WE BELIEVE FAMCO® WINS WHEN THE CUSTOMER WINS

Taking care of the customer supersedes the job description

We will always act with integrity and be dependable

We deliver the best service and quality in the industry

WE BELIEVE IN FOSTERING A CULTURE OF TEAMWORK

We prioritize the safety and wellbeing of our team

We treat each other with trust and respect

We have fun, celebrate victories, and share success

WE BELIEVE IN INVESTING IN THE FUTURE BY

Challenging the status quo

Improving processes and eliminating waste

Embracing change and pursuing it with passion

TABLE OF CONTENTS

FAMCO®

About Us	3
Vision/Mission	4
FAMCO Family Values	4
Table of Contents	6-7

Metal Choices	8
Where Some of Our Products Go	9

WALL VENTS

Hooded Wall Vents with Damper Only	10
Hooded Wall Vents with Screen Only	10
Hooded Wall Vents with Screen & Damper	10
Stucco Wall Vents with Damper	11
Stucco Wall Vents with Screen	11
Stucco Wall Vents with Damper & Screen	11
Big Mouth Hooded Wall Vent with Spring Loaded Damper, Gasket & Screen	12
Big Mouth Hooded Wall Vent with Spring Loaded Damper, Gasket, Screen HD Powder Coat Black 6"	13
Rectangular Hooded Wall Vent with Damper - 3 1/4" X 10" with Optional Screen	14
Rectangular Appliance Wall Vent - 3 1/4" X 10" with Damper & Screen	15
Heavy Duty Rectangular Hooded Wall Vent - 3 1/4" X 14" with Damper	15
Reversible Damper Wall Vent	16
Polymer Wall Vent with Damper	17
Flush Mount Wall Vents with Damper	18
Flush Mount Wall Vents with Damper & Screen	18
Flush Mount Wall Vents with Damper & Extension	18
Flush Mount Louvered Wall Vents with Screen	19
Polymer Wall Vent with Movable Louvers, No Tube	20

WALL VENTS

Polymer Wall Vent with Fixed Louvers & Screen, No Tube	21
Louvered Gable Vent	22
Louvered Gable Vent with Round Transition	23
Louvered Soffit Vent with and without Screen	24
Louvered Foundation Vent	24
Louvered Foundation Vent with Damper	24
Louvered Foundation Vent with Screen	24
Louvered Foundation Vent with Screen & Damper	24
Plumbers Vent	25
Polymer Round Soffit/ Under Eave Vent 4 Inch	26
Polymer Round Soffit/ Under Eave Vent 6 Inch	26
NEW: Paint Lock Under Eave Vent	26
NEW: Textured Wall Vent Highlight	27
NEW: Builder Series Wall Vents	28 & 29
Copper Highlight	30

ROOFING PRODUCTS

ROOF VENTS

Bathroom/ Kitchen Exhaust Vent with Screen and Damper	32
Bathroom/Kitchen Exhaust Vent with Damper, Screen and Extension	33
Polymer Bathroom/ Kitchen Exhaust Vent with Screen, Damper and Removable Stem	34
Louvered Roof Vent with Slant Back	35
Goose Neck Roof Vents	36
Goose Neck Roof Vents with Extension	36
J-Vent	37
J-Vent with Extension	38

ROOFING PRODUCTS	
ROOF VENTS	
J-Vent with 6" Clearance	39
J-Vent with Shake Base	40
Polymer Roof Vent with 50 SQ IN Net Free Area	41
Roof Vent with 38 SQ IN Net Free Area	41
ROOF CAPS	
Cone Top Cap	42
Cone Top Cap with Screen	43
Universal Cap	44
Vacuum Cap	45
Globe Vent	46
Wind Directional Cap	47
Wind Cap Adapter	48
Masonry to Metal Chimney Transition	49
ROOF VENT BASES	
Round Vent Base-Flat	50
Flat Sub Base 3 In Tall- No Crimp	50
Round Vent Base- Pitched	51
Round Vent Base-Saddle	51
FLASHINGS	
Pipe Flashing- Flat Pitch Roof	52
Tall Pipe Flashing- Flat Pitch Roof	53
Pipe Flashing- Adjustable 1-6/12 Pitch	54
B-Vent Pipe Flashing- Adjustable 1-6/12 Pitch	55
Pipe Flashing- Adjustable 7-12/12 Pitch	55
B-Vent Pipe Flashing- Adjustable 7-12/12 Pitch	56
Cricket Flashing	57
MAKE UP AIR	
Make Up Air Highlight	58
MUHDS MUAS MUUS MUPSS	59

MAKE UP AIR	
DAMPERS	
Motorized Damper Normally Open/ Power Closed	60
Motorized Damper Normally Closed/ Power Open	60
Backdraft/ Butterfly Damper	61
Inline Spring-Loaded Backdraft/ Butterfly Damper	62
Pressure Relief Barometric Damper	63
Polymer Highlight	64
ACCESSORIES	
Damper Motor	65
Duct Increaser/ Reducer	65
Polymer Increaser/ Reducer	66
Tapered Duct Reducer	66
Plug Reducer- Crimped	67
Square to Round Transition Box	67
Stucco Trim for Round Wall Vents	68
Flue Cap	68
Flue Plug with Crimp	69
Storm Collar	69
Storm Collar for B-Vent	70
Starter Collar	70
Wall Vent Collars	70
Polymer Vent Guard	71
Vent Screen 6 Inch X 100 Foot	71
Nail Plate	71
Furnace Filter Rack	72
Furnace Filter Rack Base	73
Recycling Metals Highlight	75
Terms of Sale / Delivery Terms / Guarantee / Errors & Omissions / Ordering Information	76-77
Return Policy / Freight Claims	78


METAL CHOICES



ALUMINUM (A)



COPPER (CU)

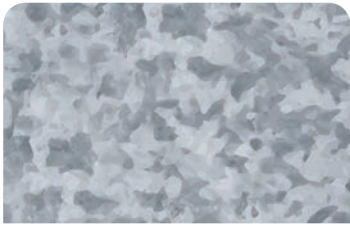

GALVANIZED (G)



STAINLESS STEEL (SS)



ZINC ALUMINUM (ZA)

PAINT LOCK



PAINT LOCK (PL)

Why choose Paint Lock?

At up to 25% less expensive than our pre-painted vents and far more customizable, this material is ready to paint with no cleaning, etching or priming, saving significant time on the job site.

Our Paint Lock vents range from subtle neutrals to bold hues, so your creative vision can be brought to life.

PLASTIC



PLASTIC
WHITE, BROWN, BEIGE
(WH) (BR) (BG)


PAINTED




PAINTED - WHITE (WH)



PAINTED - GRAY (GR)




PAINTED - BROWN (BR)




PAINTED - BLACK (BK)

WHERE SOME OF OUR PRODUCTS GO

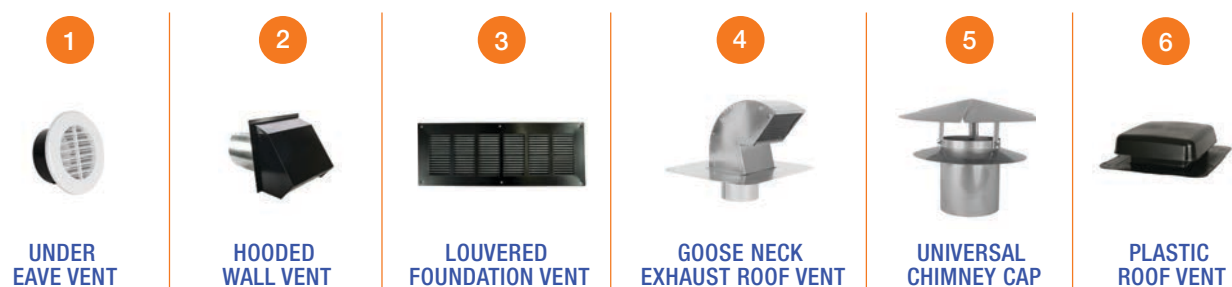

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel, 24 gauge Copper, or 0.02 mill-finished Aluminum
- Pre-painted options also available in Galvanized steel
- Primarily used for air exhaust applications (not rated for dryer ventilation).
- Available with a built-in hinged backdraft damper to allow steady air flow when venting.
- Available with $\frac{1}{4}$ inch insect screen to prevent birds and many kinds of insects from entering the duct.
- Angled hood design for balanced profile and air flow
- Available with standard 8 $\frac{1}{4}$ " long Galvanized Steel tube or 1 $\frac{1}{2}$ " short tube, built into flange for wall mounted installation.
- Now available in Paint Lock Material

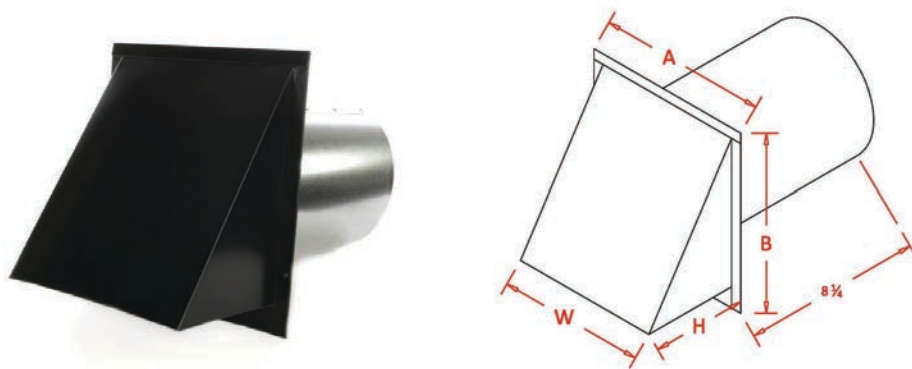

HOODED WALL VENTS

(ITEM)(SIZE)(COLOR) **EXAMPLE:** SDWW3BK= SDWW (ITEM)- 3" (SIZE)- BLACK (MATERIAL/COLOR)

ITEM:

DWV Hooded Wall Vents with Damper only (No Screen)

SWV Hooded Wall Vents with Screen Only


SDWV Hooded Wall Vents with Screen and Damper

COLOR: A CU G PL WH BR BK

**Add ST if short tube is desired*

**Add NT if NO tube is desired*

SIZE	A	B	W	H
3	6	6 $\frac{7}{16}$	5	3 $\frac{1}{4}$
4	6	6 $\frac{7}{16}$	5	3 $\frac{1}{4}$
5	7	7 $\frac{7}{16}$	6	3 $\frac{3}{4}$
6	8	8 $\frac{7}{16}$	7	4 $\frac{7}{16}$
7	9	9 $\frac{7}{16}$	8	4 $\frac{15}{16}$
8	10	10 $\frac{3}{8}$	9	5 $\frac{9}{16}$
10	13	12 $\frac{1}{2}$	12	6 $\frac{7}{8}$
12	15	14 $\frac{1}{2}$	14	7 $\frac{15}{16}$
14	17 $\frac{1}{2}$	17 $\frac{3}{4}$	16	9 $\frac{3}{4}$

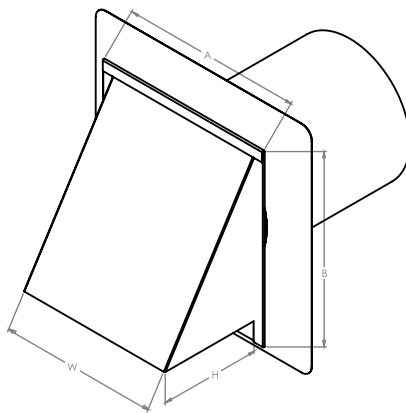

STUCCO WALL VENTS

(ITEM)(SIZE)(COLOR) **EXAMPLE:** SDWVGSR8= SDWVGSR (ITEM)- 8" (SIZE)

ITEM:

DWVGSR Stucco Wall Vent with Damper

SWVGSR Stucco Wall Vent with Screen


SDWVGSR Stucco Wall Vent with Damper and Screen

COLOR: G 

FEATURES:

- Made from heavy-duty 28 gauge Galvanized Steel.
- Primarily used for air exhaust applications.
- Includes a ¼ inch screen to prevent pests from getting in.

Size	F	H	A	B	W
4	8 3/4 x 8 3/4	3 1/4	6	6 7/16	5
5	9 3/4 x 9 3/4	3 3/4	7	7 7/16	6
6	10 3/4 x 10 3/4	4 7/16	8	8 7/16	7
7	11 3/4 x 11 3/4	4 15/16	9	9 7/16	8
8	12 3/4 x 12 3/4	5 9/16	10	10 3/8	9
10	14 3/4 x 14 3/4	6 7/8	13	12 1/2	12

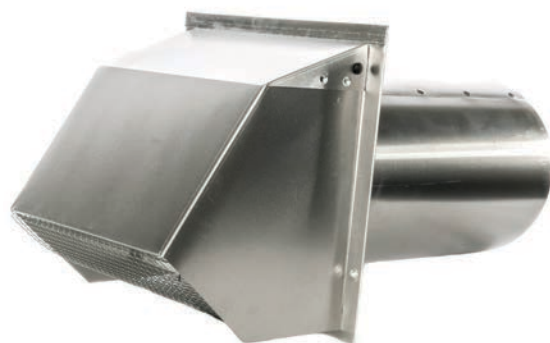

Includes 8¼" Tail Pipe

FEATURES:

- Wide mouth hood designed for optimal airflow, perfect for kitchen range or bathroom exhaust.
- Quality constructed from heavy-duty 28 gauge Galvanized Steel, .020 gauge Aluminum, or NEW 26 gauge Paint Lock material.
- Features ¼ inch removable screen and spring loaded damper with built in foam gasket.
- Available with or without an 8-¼" long Galvanized Steel tube built into the flange for wall mounted installation.
- Pre-painted Galvanized Steel color options include white, brown, and black.

BIG MOUTH HOODED WALL VENTS

(ITEM)(SIZE)(COLOR) **EXAMPLE:** WWEB3A= WWEB (ITEM)- 3" (SIZE)- ALUMINUM (MATERIAL/COLOR)

ITEM:


WWEB Big Mouth Hooded Wall Vent with Spring Loaded Damper, Gasket, Screen

COLOR: A  G  PL  WH  BR  BK 

**Add ST if short tube is desired*

**Add NT if NO tube is desired*

Size	A	B	L	W	FW	FH
3	2 1/4	2 1/4	4 1/8	4 7/8	6	6 1/2
4	2 1/4	2 1/4	4 1/8	4 7/8	6	6 1/2
5	3	3	5 3/8	6 7/8	8	8 1/2
6	3	3	5 3/8	6 7/8	8	8 1/2
7	3	4 7/16	6 11/16	8 7/8	10	10 1/2
8	3	4 7/16	6 11/16	8 7/8	10	10 1/2
10	2 7/8	4 3/16	6 11/16	11 7/8	13	12 1/2

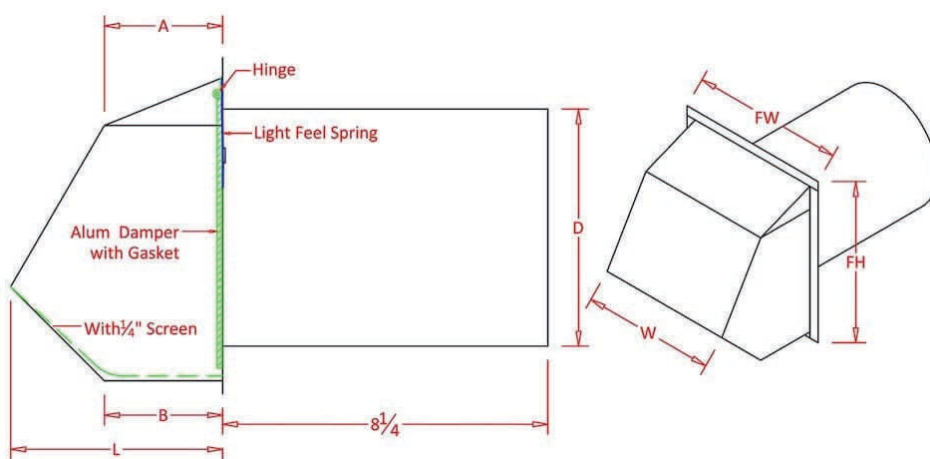



HEAVY-DUTY BIG MOUTH HOODED WALL VENT


(ITEM)(SIZE)(COLOR) **EXAMPLE:** WVEBH6BK = WVEBH (ITEM) - 6" (SIZE) - BLACK (MATERIAL/COLOR)

ITEM:

WVEBH6BK Heavy-Duty Big Mouth Hooded Wall Vent With Spring Loaded Damper, Gasket and Screen, Powder Coat Black, 6 Inch Only

SIZE: Available in 6" Size, Black Powder Coat Only.

COLOR: BK 

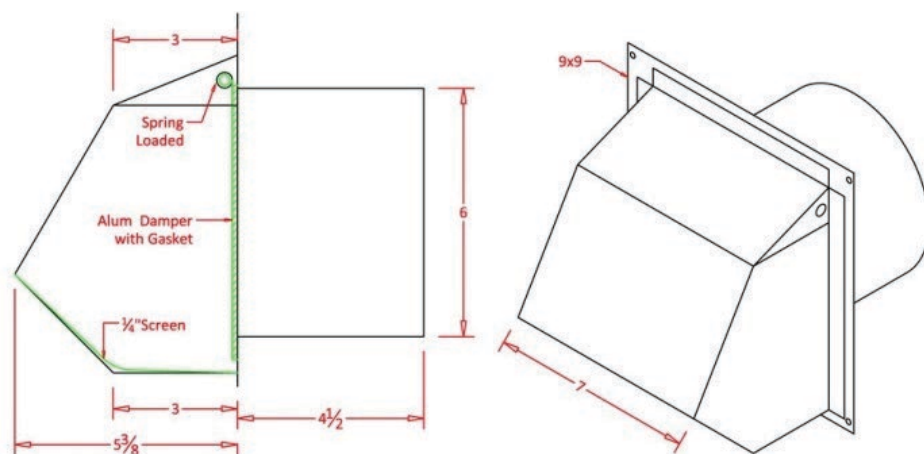

FEATURES:

- Quality constructed from heavy-duty 24 gauge Galvanized Steel with a Black Powder Coat finish.
- Primarily used for air exhaust applications, the big mouth hood offers less restriction to air flow.
- Comes with a built-in spring loaded damper, gasket and removable 1/4 inch bird screen to prevent many kinds of insects and birds from accessing the hood.
- Features a built-in backdraft damper.
- Available in 6 inch size, Black Powder Coat only.

FEATURES:

- Compact hood designed for through-wall kitchen range exhaust in narrow clearance terminations.
- Quality constructed from heavy-duty 28 gauge Galvanized Steel, 24 gauge Copper or .020 Aluminum
- Pre-painted option available for Galvanized Steel in black, brown or white.
- Available with or without 1/4 inch removable bird screen.
- Comes with a hinged back draft damper with foam gasket to allow steady airflow only when venting.
- Comes with an 8-1/4 inch long Galvanized Steel extension built into the flange for wall mounted installation – no screws needed.



RECTANGULAR HOODED WALL VENT 3-1/4 IN. X 10 IN.


(ITEM)(SIZE)(COLOR) **EXAMPLE: WV310A = WVEB (ITEM) - 310 (SIZE) - ALUMINUM (MATERIAL/COLOR)**

ITEM:

WV310 Rectangular Hooded Wall Vent with Damper 3X10 with Optional Screen

SIZE: Available in 3-1/4"x10" inch size only.

COLOR: A  CU  G  WH  BR  BK 

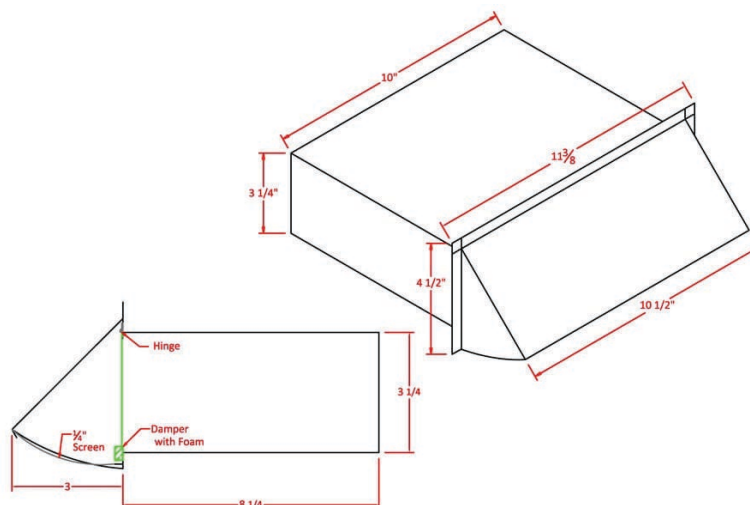

RECTANGULAR APPLIANCE WALL VENT 3-1/4 IN. X 10 IN.




(ITEM)(SIZE)(COLOR) **EXAMPLE:** WV310HDBK = WVEB (ITEM) -310 (SIZE) - POWDERED BLACK (MATERIAL/COLOR)

ITEM:

WV310HDBK Heavy Duty Rectangular Hooded Wall Vent with Damper and Screen 3X10

SIZE: Available in 3-1/4"x10" inch size and Black Powder Coated Steel only.

COLOR: BK 

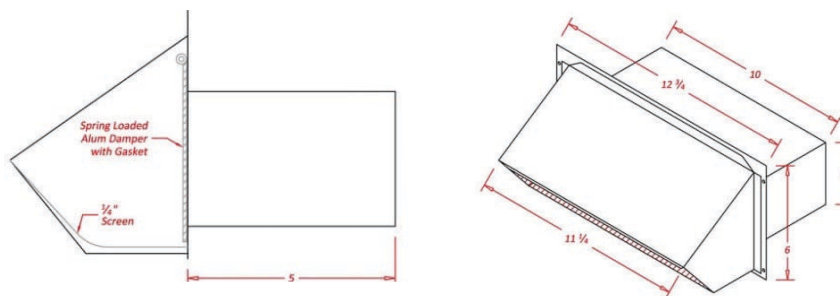

HEAVY-DUTY RECTANGULAR HOODED WALL VENT 3-1/4 IN. X 14 IN.


(ITEM)(SIZE)(COLOR) **EXAMPLE:** WV314G = WV (ITEM) -314 (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

WV314 Rectangular Hooded Wall Vent with Damper 3X14 with Optional Screen

SIZE: Available in 3-1/4"x14" inch size

COLOR: G  WH  BR  BK 

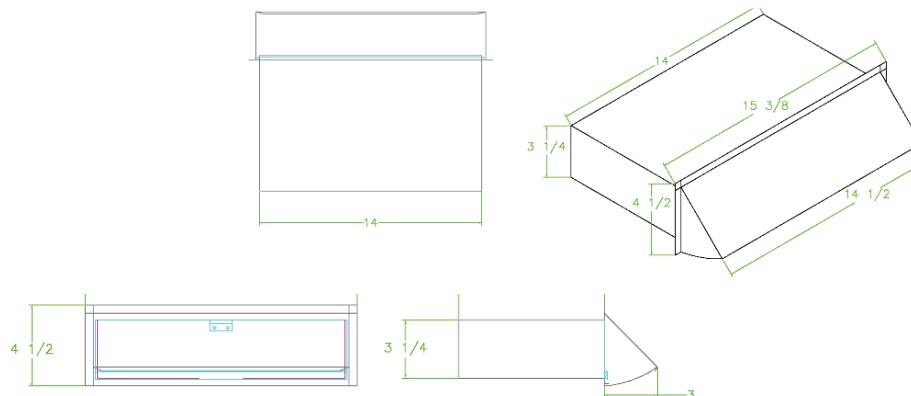

FEATURES:

- Quality constructed with heavy-duty 24 gauge Black Powder Coated Steel.
- Kitchen exhaust vent cap with a duct size of 3 1/4 inch x 10 inch.
- Features a spring loaded aluminum damper, gasket and a removable screen.

FEATURES:

- Compact hood designed for through-wall kitchen range exhaust in narrow clearance terminations.
- Quality constructed from heavy-duty 28 gauge mill-finish galvanized steel.
- Available with or without 1/4 inch removable bird screen.
- Comes with a hinged backdraft damper with foam gasket to allow steady airflow only when venting.
- Comes with an 8-1/4" long galvanized steel extension built into the flange for wall mounted installation – no screws needed.
- Call for quote if interested in Aluminum, Copper, or Stainless Steel options.



REVERSIBLE DAMPER WALL VENT

FEATURES:


- Quality constructed from heavy-duty 0.02 mill-finished Aluminum, heavy-duty 28 gauge Galvanized Steel or NEW Paint Lock material.
- Primarily used for air intake, air supply, or exhaust applications (not rated for dryer ventilation).
- Comes with a gasketed backdraft damper that can be oriented in the duct run for either intake or exhaust.
- Wall vent includes 1/8 inch insect screen to prevent birds and many kinds of insects from entering the duct.
- Angled hood design for balanced profile and air flow.

(ITEM)(SIZE)(COLOR) **EXAMPLE:** RDWV3A = RDWV(ITEM) - 3" (SIZE) - ALUMINUM (MATERIAL/COLOR)

ITEM:

RDWV Reversible Backdraft Damper Wall Vent

COLOR: A  G  PL 

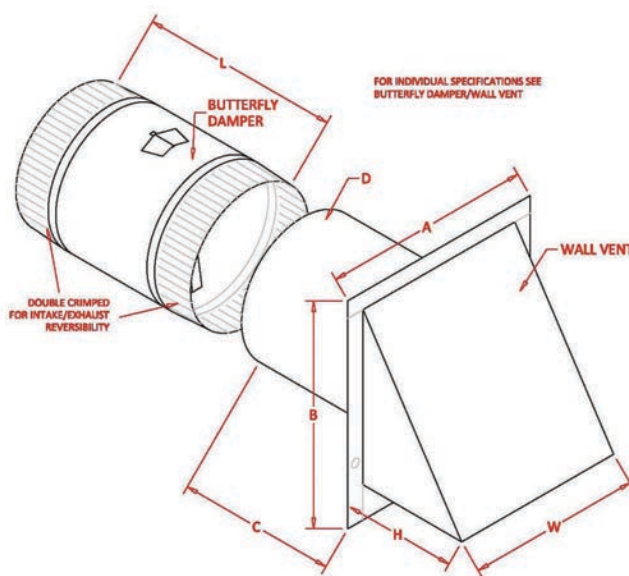

Size	A	B	C	D	H	W	L
4	6	6 7/16	4 1/2	4	3 1/4	5	6
5	7	7 7/16	4 1/2	5	3 1/4	6	6
6	8	8 7/16	4 1/2	6	4 1/2	7	6
7	9	9 7/16	4 1/2	7	5	8	7 1/4
8	10	10 3/8	4 1/2	8	5 3/4	9	7 1/4
10	13	12 1/2	4 1/2	10	6 3/4	12	7 1/4
12	15	14 1/2	4 1/2	12	8	14	9

POLYMER WALL VENT WITH DAMPER




Includes Tail Pipe

(ITEM)(SIZE)(COLOR) **EXAMPLE:** UFH3BR = UFH (ITEM) - 3" (SIZE) - BROWN (MATERIAL/COLOR)

ITEM:

UFH Plastic Dryer Vent With Hood And Damper

COLOR: WH  BR 

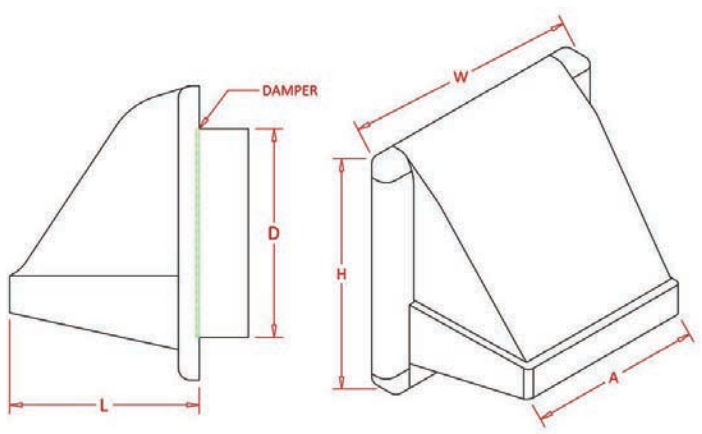

Size	W/H	L	D	A	Free Area (in ²)
3	6 1/8	4	2 15/16	4 1/2	6.78
4	6 1/8	4	3 15/16	4 1/2	12.18

FEATURES:

- Quality constructed from high density polyethylene (HDPE) plastic.
- Primarily used for dryer venting and air exhaust applications that require no screen.
- Includes a built in backdraft damper.
- Available with or without an 8- 3/4 inch long 28 gauge Galvanized Steel pipe extension for through-wall connections.

FEATURES:

- Quality constructed from 26 gauge Zinc-Aluminum, NEW Paint Lock material, or 28 gauge Galvanized Steel which can be pre-treated and painted before being installed
- Features a damper/gasket/screen and has pre-drilled holes for mounting.
- Can be used for air exhaust applications, such as bath or dryer vents ventilation or kitchen range exhaust.

FEATURES:

- Quality constructed from Zinc-Aluminum or Galvanized Steel which can be pre-treated and painted before being installed.
- Flush wall vent kit includes wall vent with 8-1/4 inch tube, 4x8 inch Non-flammable Aluminum Flex Foil Duct, and all-metal 4 inch clamp rings.
- All-in-one kit for 4 inch through-wall dryer ventilation.
- Mounting screws are not included in this kit, this wall vent can be installed with the correct type of screws for your particular siding application.



FLUSH MOUNT WALL VENT WITH DAMPER


(ITEM)(SIZE)(COLOR) **EXAMPLE:** FWV4PL= FWV (ITEM)- 4" (SIZE)- PAINT LOCK (MATERIAL/COLOR)

ITEM:

FWV Flush Mount Wall Vent with Damper (No Screen) 4", 6" and 8"

FWVE Flush Mount Wall Vent with Gasket, Damper and 1/8" Insect Screen 4", 6" and 8"

COLOR: G  ZA  PL 

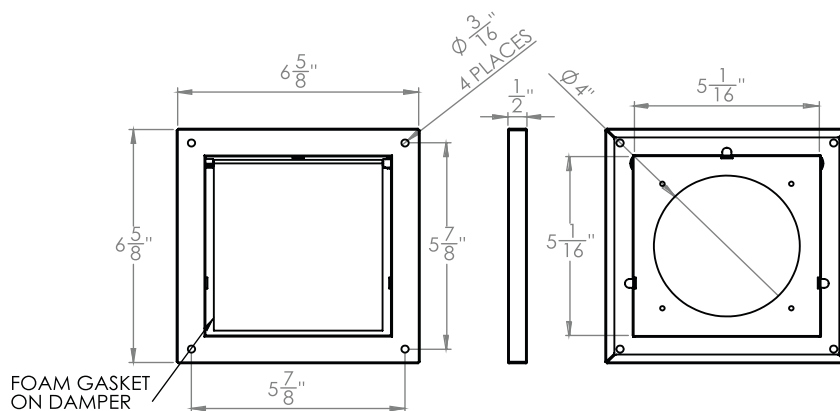

FLUSH MOUNT WALL VENT WITH DAMPER & EXTENSION


(ITEM)(SIZE)(COLOR) **EXAMPLE:** FWV4ZA-8.25KIT= FWV4-8.25 (ITEM)- ZINC-ALUMINUM (MATERIAL/COLOR)

ITEM:

FWV4-8.25KIT Dryer Vent Kit With Flush Mount Zinc-Aluminum Metal Wall Vent For 4" Duct

SIZE : 4" Pipe w/ 6-5/8" x 6-5/8" Faceplate

COLOR: G  ZA  PL 

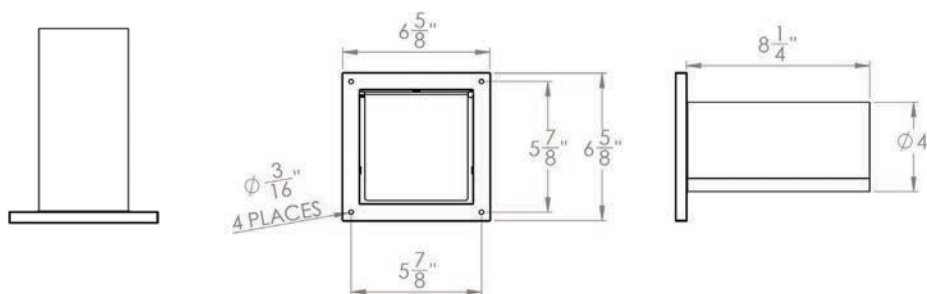



FLUSH MOUNT LOUVERED WALL VENT WITH SCREEN

(ITEM)(SIZE)(COLOR) **EXAMPLE:** LWV4ZA= LWV (ITEM) -4" (SIZE) - ZINC ALUMINUM (MATERIAL/COLOR)

ITEM:


LWV Flush Mount Louvered Wall Vent With 1/8" Insect Screen For Intake / Exhaust – Low Profile – 26 gauge Zinc-Aluminum Metal

SIZE: 4" Pipe w/ 6-5/8" x 6-5/8" Faceplate.
6" Pipe w/ 8-1/2" x 8-1/2" Faceplate

COLOR: G  ZA  PL 

FEATURES:

- Made of 26-gauge Zinc-Aluminum or Galvanized Steel which can be pre-treated and painted before being installed.
- Louvered Wall Vent with 1/8" insect screen can be used for air intake or exhaust.
- Product does not include a built-in damper.
- Now available in Paint Lock

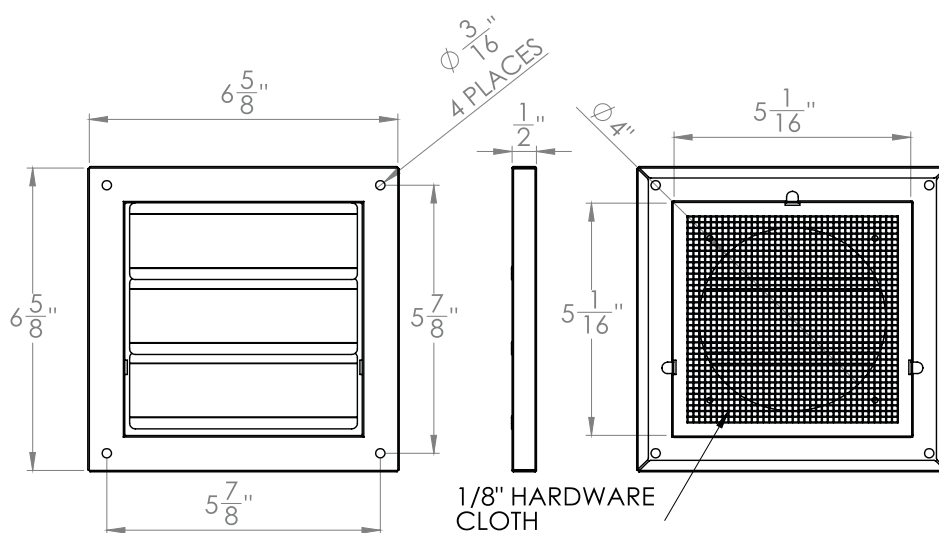

FEATURES:

- Quality constructed from Polypropylene Plastic.
- Primarily used as an exhaust vent for dryer and bathroom installations.
- Moveable louvers for consistent air flow when venting.
- Can be connected to duct measuring from 3 inch to 8 inch diameters.
- Plastic vent guard also available for use on 4 inch pipe models (sold separately).




POLYMER WALL VENT WITH MOVABLE LOUVERS, NO TUBE

(ITEM)(SIZE)(COLOR) **EXAMPLE:** LH4BR= LH (ITEM) - 4" (SIZE) - BROWN POLYMER (MATERIAL/COLOR)

ITEM:

LH Polymer Wall Vent with Movable Louvers, No Tube

COLOR: WH  BR 

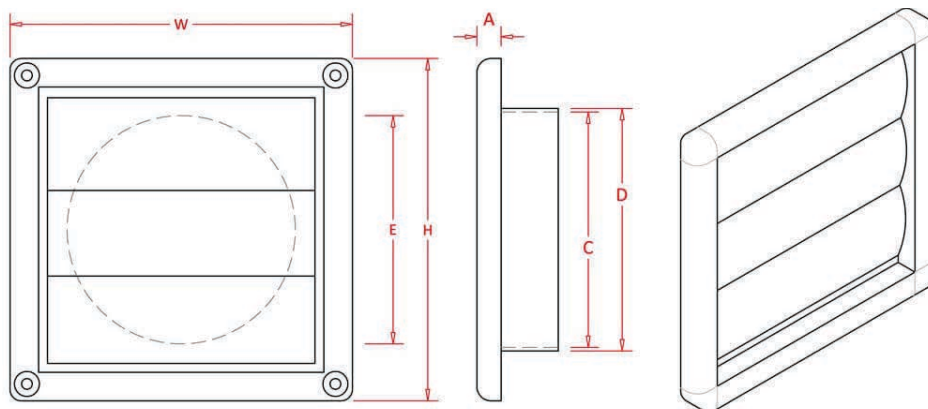

Size (IN)	A	C	D	E	W/H	Louvers	Free Area IN
4	7/16	4 1/8	4 1/4	4	6	3	12.57
6	7/16	6 1/8	6 1/4	6	8 1/8	3	28.27
8	5/8	7 3/4	7 7/8	7 3/4	10	5	50.26




POLYMER WALL VENT WITH FIXED LOUVERS AND SCREEN, NO TUBE

(ITEM)(SIZE)(COLOR) **EXAMPLE:** AI4WH= AI (ITEM) - 4" (SIZE) - WHITE POLYMER (MATERIAL/COLOR)

ITEM:

AI Polymer Wall Vent with Fixed Louvers and Screen, No Tube

COLOR: WH  BR 

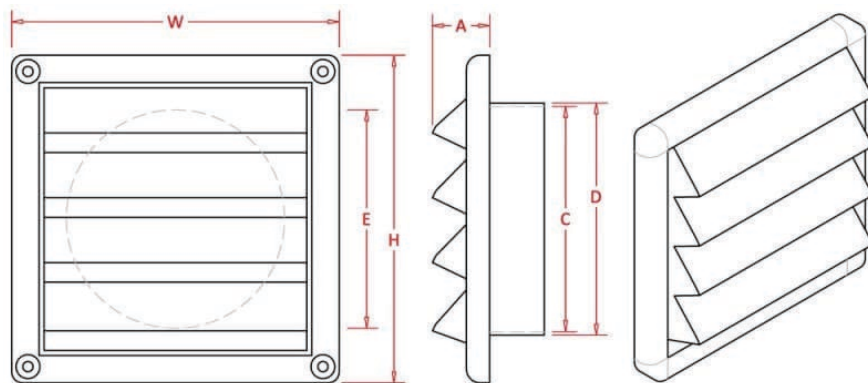

Size (IN)	A	C	D	E	W/H	Louvers	Free Area IN ²
4	1 1/16	4 1/8	4 1/4	4	6	4	10.90
6	1 1/8	6 1/8	6 1/4	6	8 1/8	5	19.30
8	1 1/2	7 5/8	7 3/4	7 5/8	10	6	35.18

FEATURES:

- Quality constructed from Polypropylene.
- Primarily used for air intake, air supply, or exhaust applications where no backdraft damper is needed (not rated for dryer ventilation).
- Includes fixed louvers and a molded screen.
- Can be connected to duct measuring 4 inch, 6 inch, and 8 inches in diameter.

FEATURES:

- Quality constructed in 26 gauge Zinc-Aluminum which can be pre-treated and painted before being installed, 28 gauge Galvanized Steel or heavy-duty 16 ounce, 24 gauge Copper and NEW 26 gauge Paint Lock material.
- Used for attic ventilation and for air intake or exhaust applications.
- Available in three options: Flush Mount (F), Recessed Mount (R), or Flange on Back (FOB).
- Comes standard with a 1/8 inch insect screen.



LOUVERED GABLE VENT

(ITEM)(SIZE)(COLOR) **EXAMPLE:** GVR1414CU= GVR (ITEM)- 14x14" (SIZE) - COPPER- (MATERIAL/COLOR)



ITEM:

GVFOB Galvanized Gable Vent - Flange on Back

GVF Galvanized Gable Vent - Flush Mount

GVR Galvanized Gable Vent - Recessed Mount

COLOR: A  CU  G  PL 

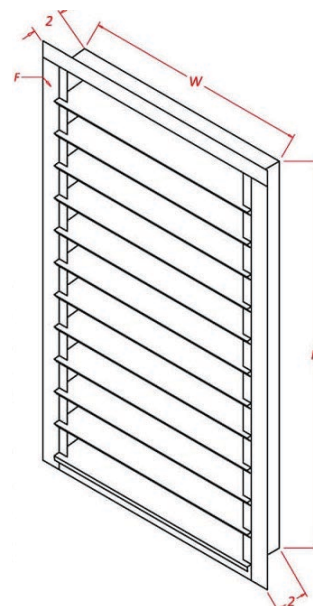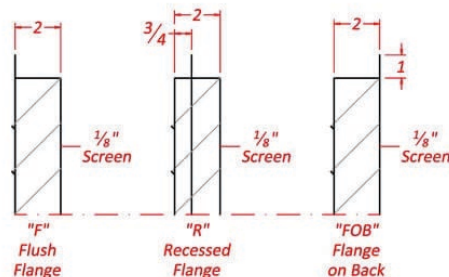

F	W	H	Louvers	Free Area
14x14	11 7/8	11 7/8	6	97.38
14x16	11 7/8	13 7/8	7	116.86
14x20	11 7/8	17 7/8	9	155.82
14x26	11 7/8	23 7/8	12	214.24
16x14	13 7/8	11 7/8	6	113.78
16x16	13 7/8	13 7/8	7	136.54
16x20	13 7/8	17 7/8	9	182.04
16x26	13 7/8	23 7/8	12	250.32




LOUVERED GABLE VENT WITH ROUND TRANSITION

(ITEM)(SIZE)(COLOR) **EXAMPLE:** GVT888G= GVT (ITEM)- 8x8x8" (SIZE)- GALVANIZED (MATERIAL/COLOR)

ITEM:

GVT Louvered Gable Vent With Round Transition

COLOR: G

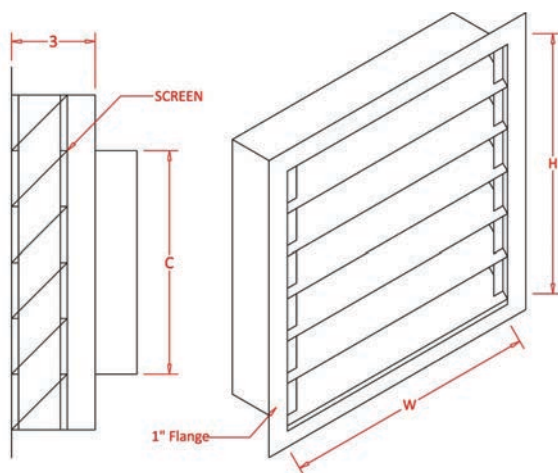


H	W	C	Free Area IN ²
8	8	6	28.27
8	8	8	50.26
12	8	6	28.27
12	8	8	50.26
12	10	8	50.26
12	10	10	78.53
12	12	8	50.26
12	12	10	78.53
12	12	12	113.10

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel.
- Used for piped attic ventilation, or for air intake or exhaust applications.
- Comes with a built-in ½ inch screen, fixed louvers, and a large mounting flange.
- Come in a range of louver and transition sizes, from 8x8x6 inch up to 12x12x12 inch (H x W x Diameter)

FEATURES:

- Quality constructed in heavy-duty 28 gauge Galvanized Steel or .020 Aluminum.
- Pre-painted Galvanized Steel options available in black, brown or white.
- Available without damper or screen (V), with damper only (VD), with screen only (VS) and with damper and screen (VDS)
- Promotes free air movement in a crawl space or attic installation.
- Made with a hemmed edge.

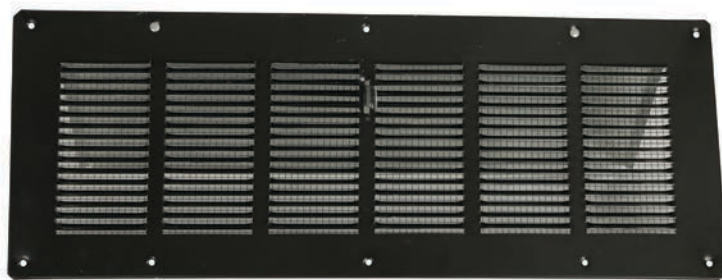

LOUVERED FOUNDATION/ SOFFIT VENT

(ITEM)(SIZE)(COLOR) **EXAMPLE:** VDS416BK = VDS (ITEM) -4x16" (SIZE) - BLACK (MATERIAL/COLOR)

ITEM:


V Louvered Foundation Vent (No Screen No Damper)

VD Louvered Foundation Vent with Damper


VS Louvered Foundation Vent with Screen

VDS Louvered Foundation Vent with Damper & Screen

COLOR: A  G  WH  BR  BK 

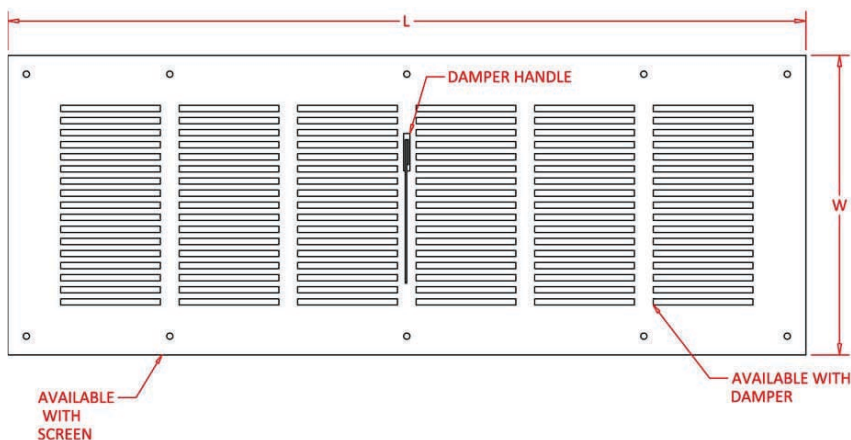

W	L	Free Area IN ²
4	16	18
6	16	24
8	16	36

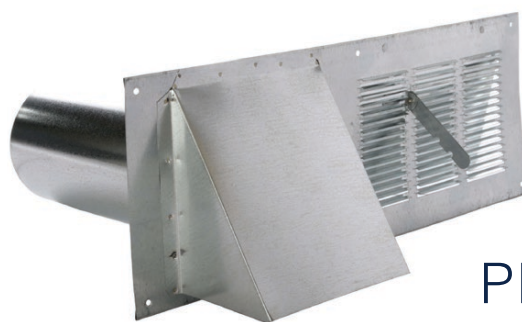

PLUMBERS VENT

(ITEM)(SIZE)(COLOR) **EXAMPLE:** PV44.5= PV (ITEM) - 44.5" (PIPE LENGTH) GALVANIZED (MATERIAL/COLOR)

ITEM:

PV Plubers Vent


PV44.5 Plubers Vent (4 1/2" Tube)

PV48.5 Plubers Vent (8 1/2" Tube)

SIZE: 6"x16"

PIPE LENGTH: 4 1/2" | 8 1/2"

COLOR: G 

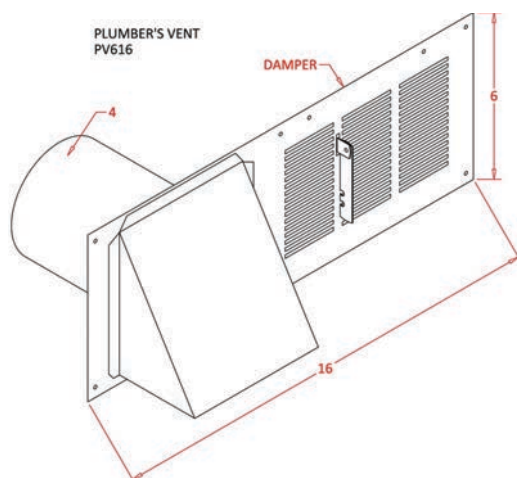

FEATURES:


- Quality constructed from heavy-duty 28 gauge Galvanized Steel.
- Alternative for dryers located away from outside walls. Standard foundation vent sizing for easy installation.
- Comes in two pipe adapter lengths: 4½ (PV44.5) inch and 8½ (PV48.5) inch long pipe.
- Outside foundation faceplate dimensions are 6 inch x 16 inch.

FEATURES:

- Quality constructed from 1/4" ABS Plastic made with UV inhibitors.
- Fascia can be rotated after installation, and includes integrated screen for pest control.
- Includes a built-in weighted backdraft damper – damper is removable for use as an intake vent.
- Built with a “hose grabber” to hold flex tube in place with the longest stem length available.
- 6 inch (Not available with built-in damper).



UEVD4

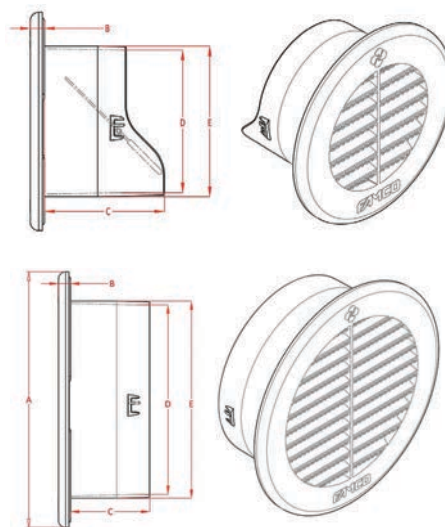

POLYMER ROUND SOFFIT/ UNDER EAVE VENT

(ITEM)(SIZE)(COLOR) **EXAMPLE:** UEVD4WH = UEVD (ITEM) -4" (SIZE) - WHITE (MATERIAL/COLOR)

ITEM:

UEVD4 Round Soffit/ Under Eave Vent 4 Inch

UEV6 Round Soffit/ Under Eave Vent 6 Inch (6 inch option not available with built-in damper)

COLOR: WH  BG  BR 

Size (in)	A	B	C	D	E	Free Area (in ²)
4	5 3/4	3/8	3 1/8	3 3/4	4	10.92
6	7 3/4	3/8	3 1/8	5 3/4	6	25.58

FEATURES:

- Made of 26-gauge Paint Lock material which can be painted without etching, priming or pre-treatment.
- The flange version has pre-drilled holes for mounting to the eave or soffit
- The non-flange version (NF) has no flange, and can be mounted flush to the eave
- Both versions feature a screen
- Can be used for air intake or exhaust applications under an eave.

PAINT LOCK UNDER EAVE VENT


(ITEM)(SIZE)(COLOR) **EXAMPLE:** UE4PL = UE (ITEM) -4" (SIZE) - PAINT LOCK (MATERIAL/COLOR)

ITEM:

UEPL Paint Lock Under Eave Vent (With Flange)

UEPLNF Paint Lock Under Eave Vent Without FLange

COLOR: PL 

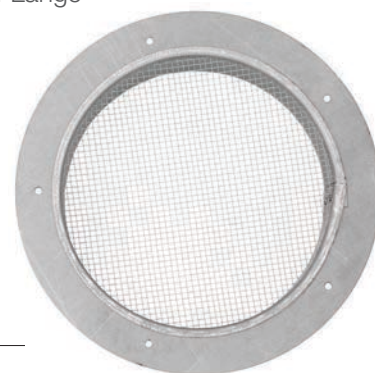

Size (in)	A	B	Free Area (in ²)
4"	2 1/32"	4"	22.6
6"	2 1/32"	6"	50.86
8"	2 1/32"	8"	90.43



NEW TEXTURED WALL VENT

(ITEM)(SIZE)(COLOR) **EXAMPLE:** THDWV4BR= THDWV (ITEM) -4" (SIZE) -BROWN (MATERIAL/COLOR)

ITEM:

THDWV Textured, **Horizontal** Grain Wall Vent WITH DAMPER ONLY (No Screen)

THSWV Textured, **Horizontal** Grain Wall Vent with Screen Only

THSDWV Textured, **Horizontal** Grain Wall Vent with Screen and Damper

TVDWV Textured, **Vertical** Grain Wall Vent WITH DAMPER ONLY (No screen)


TVSWV Textured, **Vertical** Grain Wall Vent with Screen Only

TVSDWV Textured, **Vertical** Grain Wall Vent with Screen and Damper

*Add ST if short tube is desired

*Add NT if NO tube is desired

COLOR: PL  WH  BR  BK 

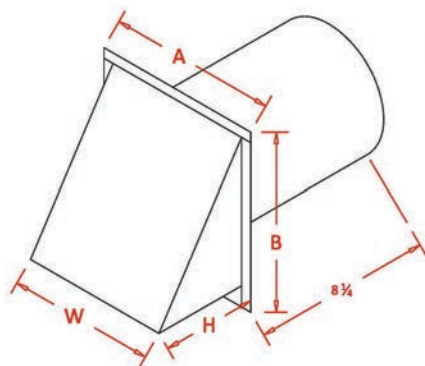

Size	A	B	W	H
3	6	6 7/16	5	3 1/4
4	6	6 7/16	5	3 1/4
5	7	7 7/16	6	3 3/4
6	8	8 7/16	7	4 7/16
7	9	9 7/16	8	4 15/16
8	10	10 3/8	9	5 9/16

FEATURES:

- Embossed with either a vertical or horizontal wood grain texture to help the vent blend in with wood grain siding and cladding.
- Offered in two materials: 26 gauge Paint Lock material which can be painted without etching, priming or pre-treatment and 28 gauge pre-painted Galvanized Steel.
- Primarily used for air exhaust applications
- Offered with all the same features as our standard Hooded Wall Vents (page 10) including screen and damper options.
- Available with standard 8 1/4" long Galvanized Steel tube or 1 1/2" short tube, built into flange for wall mounted installation.



NEW



BUILDERS SERIES WALL VENTS!

BUILDERS SERIES WALL VENTS!

BUILDERS SERIES WALL VENTS! FAMCO® is excited to announce our Builders Series of wall vents. This economical line of Wall Vents offers all the performance and quality you expect, but at a 20%+ savings over our traditional vents. Available in 4", 5" and 6", these vents ship in pallet quantities.



PAINT LOCK MATERIAL! FAMCO® is pleased to announce the addition of our new Paint Lock material to our product offering, starting with the Builders Series Hooded Wall Vents. At up to 25% less expensive than our pre-painted vents and far more customizable, this material is ready to paint with no cleaning, etching or priming, saving significant time on the job site.



A LOWER COST OPTION FOR RESIDENTIAL AND COMMERCIAL BUILDERS



BUILDERS SERIES HOODED WALL VENTS WITH PAINT LOCK

PART NUMBER MATRIX:

[BK] BLACK
 [BR] BROWN
 [G] GALVANIZED
 [WH] WHITE
 [PL] PAINT LOCK

BUILDERS SERIES HOODED WALL VENT WITH DAMPER

SIZE: 4"

BDWW4 G
 BDWW4BK BK
 BDWW4WH WH
 BDWW4BR BR
 BDWW4PL PL

SIZE: 6"

BDWW6 G
 BDWW6BK BK
 BDWW6WH WH
 BDWW6BR BR
 BDWW6PL PL

SIZE: 8"

BDWW8 G
 BDWW8BK BK
 BDWW8WH WH
 BDWW8BR BR
 BDWW8PL PL

BUILDERS SERIES HOODED WALL VENT WITH DAMPER, NO TUBE

SIZE: 4"

BDWW4PLNT PL

SIZE: 6"

BDWW6PLNT PL

SIZE: 8"

BDWW8PLNT PL

BUILDERS SERIES HOODED WALL VENT WITH SCREEN

SIZE: 4"

BSWW4 G
 BSWW4BK BK
 BSWW4WH WH
 BSWW4BR BR
 BSWW4PL PL

SIZE: 6"

BSWW6 G
 BSWW6BK BK
 BSWW6WH WH
 BSWW6BR BR
 BSWW6PL PL

SIZE: 8"

BSWW8 G
 BSWW8BK BK
 BSWW8WH WH
 BSWW8BR BR
 BSWW8PL PL

BUILDERS SERIES HOODED WALL VENT WITH SCREEN, NO TUBE

SIZE: 4"

BSWW4PLNT PL

SIZE: 6"

BSWW6PLNT PL

SIZE: 8"

BSWW8PLNT PL

BUILDERS SERIES HOODED WALL VENT WITH DAMPER & SCREEN

SIZE: 4"

BSDWW4 G
 BSDWW4BK BK
 BSDWW4WH WH
 BSDWW4BR BR
 BSDWW4PL PL

SIZE: 6"

BSDWW6 G
 BSDWW6BK BK
 BSDWW6WH WH
 BSDWW6BR BR
 BSDWW6PL PL

SIZE: 8"

BSDWW8 G
 BSDWW8BK BK
 BSDWW8WH WH
 BSDWW8BR BR
 BSDWW8PL PL

BUILDERS SERIES HOODED WALL VENT WITH DAMPER & SCREEN, NO TUBE

SIZE: 4"

BSDWW4PLNT PL

SIZE: 6"

BSDWW6PLNT PL

SIZE: 8"

BSDWW8PLNT PL

NEW



PRODUCT FAMILY AND MATERIAL



COPPER

Are you wanting to add more character to the exterior of your home?

THEN CHOOSE THE BEAUTY OF COPPER.

Available in a variety of roof and wall vents, copper brings a sensational look and feel to any style of home.

WHY COPPER?

COPPER PROVIDES MANY BENEFITS.


- ❁ Copper will age over time with a gorgeous and weathered patina giving a more rustic look to any structure.
- ❁ Copper is a highly durable metal, preventing weather damage to the vent.

For that special exterior project ask if we make it in copper.

Quality HVAC Solutions
Since 1989



ROOFING PRODUCTS

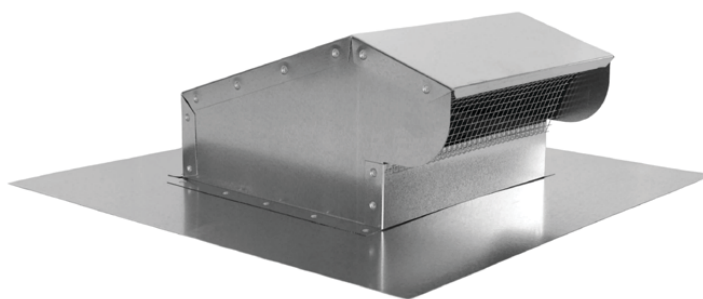

BATHROOM/ KITCHEN EXHAUST VENT WITH SCREEN AND DAMPER

FEATURES:


- Quality constructed from heavy-duty 24 gauge Copper, heavy-duty or 28 gauge Galvanized steel.
- Pre-painted Galvanized Steel, available in black or brown.
- Designed for use with bathroom or kitchen exhaust venting systems.
- Comes with a built-in hinged damper to prevent back draft.
- Includes a removable $\frac{1}{4}$ inch screen to prevent hood access by birds and many insects.

(ITEM)(SIZE)(COLOR) **EXAMPLE:** BK4G = BK (ITEM) - 4" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

BK Bathroom/ Kitchen Exhaust Vent with Damper and Screen

COLOR: CU  G  BR  BK 

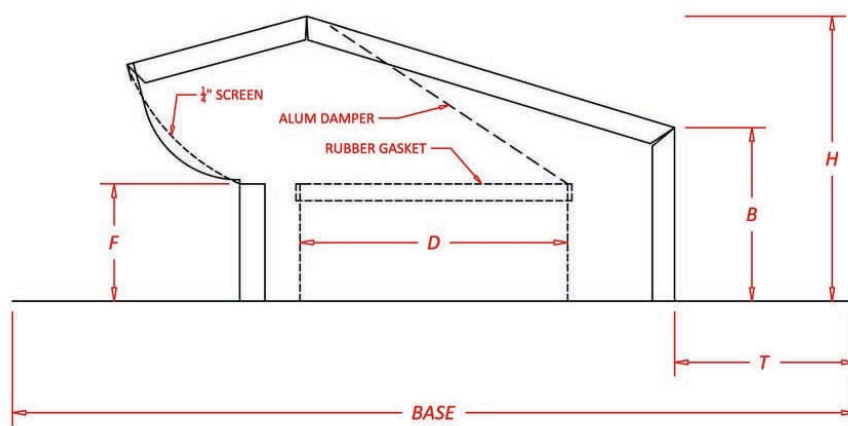

(Size) D	Base	T	H	B	F
4	12x12	2 1/2	4 1/4	2 9/16	1 3/4
5	16x14	3 3/8	5 5/16	3 1/4	2 3/16
6	16x16	3 1/2	6 3/8	3 3/4	2 1/2
8	18x18	4 1/2	7	3 3/4	2 1/2
10	24x24	5 1/8	8 3/4	4 5/8	3 1/8




BATHROOM/KITCHEN EXHAUST VENT WITH DAMPER, SCREEN AND EXTENSION

(ITEM)(SIZE)(COLOR) **EXAMPLE:** BKX4G = BKX (ITEM) -4" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

BKX Bathroom/Kitchen Exhaust Vent with Damper, Screen and Extension

COLOR: CU  G  BR  BK 

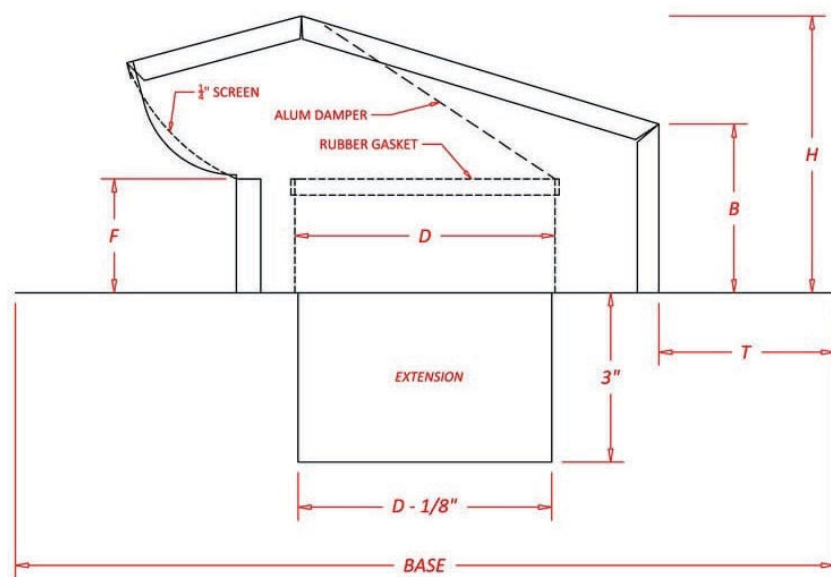

(Size) D	Base	T	H	B	F
4	12x12	2 1/2	4 1/4	2 9/16	1 3/4
5	16x14	3 3/8	5 5/16	3 1/4	2 3/16
6	16x16	3 1/2	6 3/8	3 3/4	2 1/2
8	18x18	4 1/2	7	3 3/4	2 1/2
10	24x24	5 1/8	8 3/4	4 5/8	3 1/8

FEATURES:

- Quality constructed from heavy-duty 16 ounce, 24 gauge Copper, or heavy-duty 28 gauge Galvanized Steel.
- Pre-painted Galvanized Steel, available in black or brown.
- Designed for use with bathroom or kitchen exhaust venting systems.
- Comes with a built-in hinged damper to prevent back draft.
- Includes a removable 1/4 inch screen to prevent hood access by birds and many insects.
- This model includes a 3 inch long pipe extension.

FEATURES:

- Quality constructed from high density polyethylene (HDPE).
- Contains UV inhibitors which help protect the material from deteriorating in the sunlight.
- Includes twist and lock extension tube that does not require screens.
- Comes with a built-in damper to prevent backdraft.
- Includes a built-in 1/4 inch screen to prevent hood access by birds and many insects.
- Screen can be removed for use as a rooftop dryer vent (screen cannot be reinserted once removed).
- Available for 4 inch or 6 inch pipe sizes.




POLYMER BATHROOM/ KITCHEN EXHAUST VENT WITH SCREEN, DAMPER AND REMOVABLE STEM

(ITEM)(SIZE)(COLOR) **EXAMPLE:** BVDS4BK= BVDS (ITEM) - 4" (SIZE) - BLACK (MATERIAL/COLOR)

ITEM:

BDVS Polymer Bathroom/ Kitchen Exhaust Vent with Screen, Damper and Removable Stem

COLOR: WH  BR  BK 

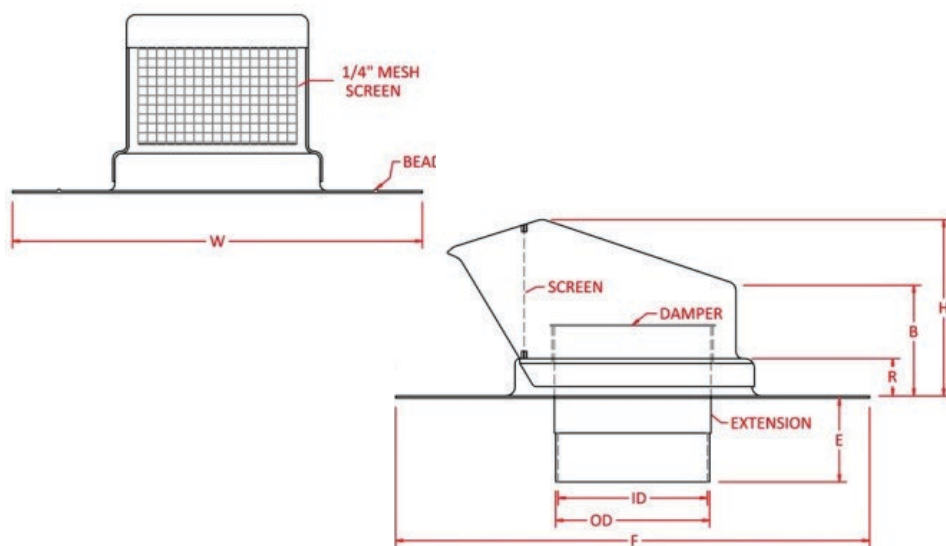

OD	ID	W	F	E	R	B	H	Free Area
4 1/8	4	11	12 3/4	2 1/2	1	3	4 3/4	12.56
6	5 7/8	12 3/4	14 1/2	3	1	3	4 3/4	28.27



LOUVERED ROOF VENT WITH SLANT BACK


(ITEM)(SIZE)(COLOR) **EXAMPLE:** LRV50BR= LRV50 (ITEM) - BROWN (MATERIAL/COLOR)

ITEM:

LRV50 Louvered Roof Vent with Slant Back

SIZE : 16"x18"

COLOR: CU  G  WH  GR  BR  BK 

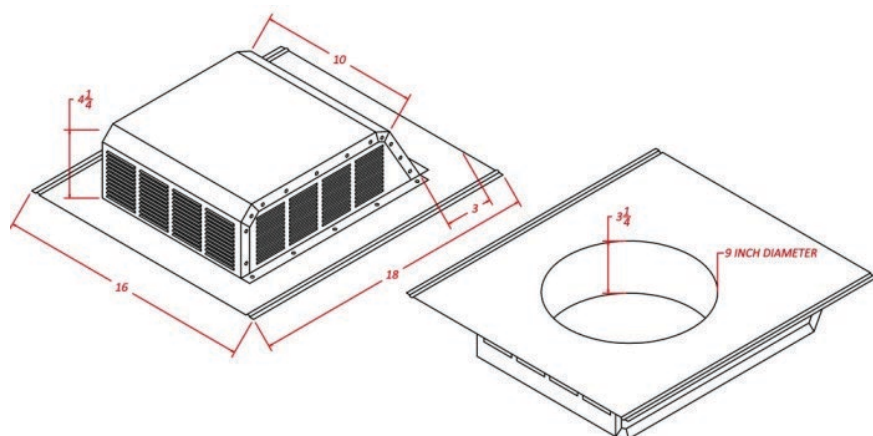


FEATURES:

- Quality constructed in heavy-duty 28 gauge Galvanized Steel. Also available in 16 ounce, 24 gauge Copper.
- Pre-painted Galvanized Steel color options are black, brown, gray, and white.
- Perfect for attic ventilation, this vent features a 50 square inch opening, louvers on three sides, slant back and low silhouette.
- Works best when used with a soffit or gable end venting.
- Fits all pitched roofs + comes with a sealed weather-proof tall collar for increased weather protection.
- Has a flange that measures 16 inches x 18 inches and will receive up to a 9 inch diameter pipe.



FEATURES:

- Quality constructed in 28 gauge Galvanized Steel or heavy-duty 28 gauge pre-painted Galvanized Steel, available in a black or brown.
- Comes with a damper to prevent back draft, and a 1/4 inch screen.
- Designed to use with bathroom or kitchen exhaust venting systems.
- Optional 3-1/8 inch extension.

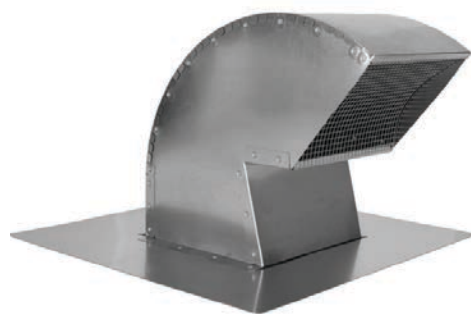

with Extension

GOOSE NECK ROOF VENTS

(ITEM)(SIZE)(COLOR) **EXAMPLE:** GNX4G = GNX (ITEM) - 4" (SIZE) - GALVANIZED (MATERIAL/COLOR)


ITEM:

GN Goose Neck Roof Vents

GNX Goose Neck Roof Vents with Extension

Optional 3-1/8 inch extension

COLOR: G  BR  BK 

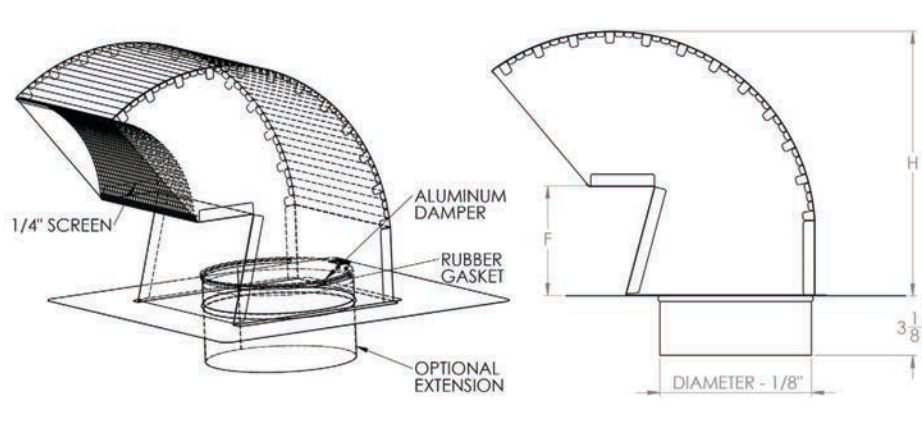

Size	Base	H	F	Dia.	Mouth Opening
4	12x12	7	2 7/8	4	4 3/4 x 4
5	15 3/4 x 14	8 3/4	3 5/8	5	5 15/16 x 4 15/16
6	16x16	10 1/2	4 3/8	6	7 1/8 x 6
8	18x18	14	5 13/16	8	9 1/2 x 8




J VENT

(ITEM)(SIZE)(COLOR) **EXAMPLE:** JV3G = JV (ITEM) - 3" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

JV J Vent

COLOR: G  CU  BR  BK 

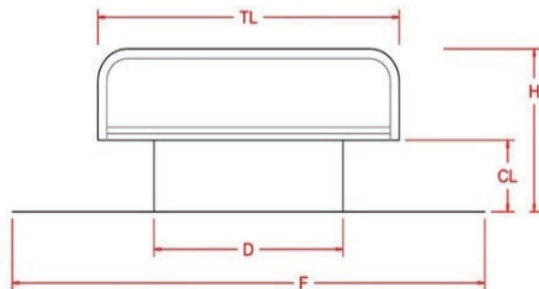

D	F	CL	H	TW	TL	Free Area
3	9x9	1 1/4	3 1/8	3	5	7.06
4	9x9	1 3/4	3 1/2	4	6 3/8	12.56
5	12x12	1 3/4	4 9/16	5	8	19.63
6	12x15	1 3/4	4 7/8	6	9 1/2	28.27
7	12x15	1 3/4	4 13/16	7	11	38.48
8	15x15	1 3/4	5 5/16	8	12 5/8	50.26
9	15x18	1 3/4	5 9/16	9	14 3/16	63.61
10	16x20	2	6 5/16	10	15 3/4	78.53
12	20x24	2 1/2	7	12	18 7/8	113.09
14	22x24	3	7	17	18 1/2	153.93
16	28x28	4	10 1/2	19 1/2	20 1/2	201.06

FEATURES:

- Quality constructed from heavy-duty 28-26 gauge Galvanized Steel depending on size or 16 ounce, 24 gauge Copper.
- Pre-painted Galvanized Steel color options available in black or brown.
- Great for attic (static) ventilation and can be used with most roofing materials.
- Provides a low silhouette and is open on two sides for better air flow.
- Helps eliminate attic moisture and heat build-up.
- Works best when used with soffit or gable end venting.
- Comes with a built in 1/8 inch screen.

FEATURES:

- Quality constructed from heavy-duty 28-26 gauge Galvanized Steel.
- Pre-painted options in black and brown.
- This model features a 3 inch bottom stem for a flex pipe connection, and is designed for bathroom ventilation.
- Provides a low silhouette and is open on two sides for better air flow.
- Comes with a built in 1/8 inch screen.
- Available in opening sizes ranging from 3 – 8 inch diameters.




J VENT WITH EXTENSION

(ITEM)(SIZE)(COLOR) **EXAMPLE:** JVX3G = JVX (ITEM) - 3" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

JVX J-Vent with Extension

COLOR: G  BR  BK 

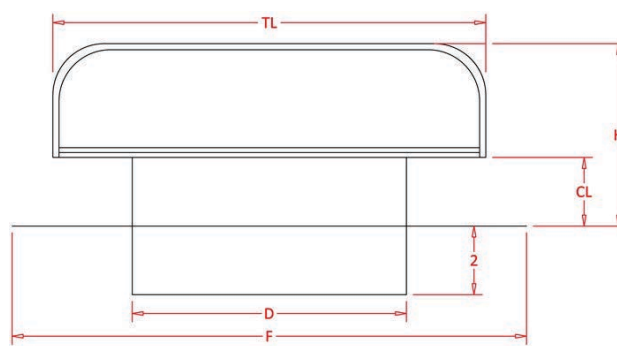

D	F	CL	H	TW	TL	Free Area
3	9x9	1 1/4	3 1/8	3	5	7.06
4	9x9	1 3/4	3 1/2	4	6 3/8	12.56
5	12x12	1 3/4	4 9/16	5	8	19.63
6	12x15	1 3/4	4 7/8	6	9 1/2	28.27
7	12x15	1 3/4	4 13/16	7	11	38.48
8	15x15	1 3/4	5 5/16	8	12 5/8	50.26
9	15x18	1 3/4	5 9/16	9	14 3/16	63.61
10	16x20	2	6 5/16	10	15 3/4	78.53
12	20x24	2 1/2	7	12	18 7/8	113.09
14	22x24	3	7	17	18 1/2	153.93




J VENT WITH 6 IN CLEARANCE

(ITEM)(SIZE)(COLOR) JVCL3G = JVCL (ITEM) - 3" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

JVCL J-Vent with 6" Clearance

COLOR: G  BR  BK 

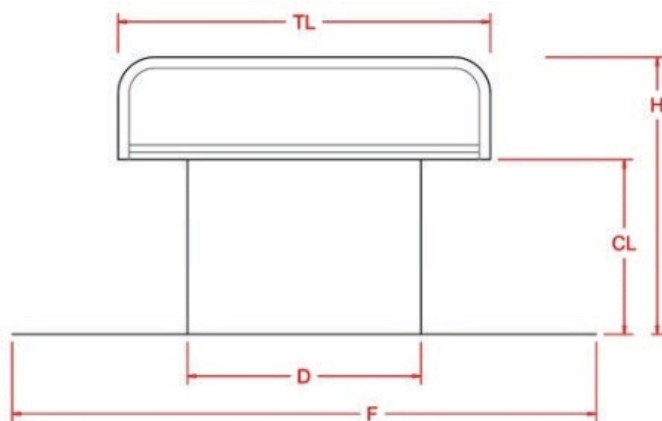

D	F	CL	H	TW	TL	Free Area
3	9x9	6	7 7/8	3	5	7.06
4	9x9	6	8 1/4	4	6 3/8	12.56
5	12x12	6	9 5/16	5	8	19.63
6	12x15	6	9 5/8	6	9 1/2	28.27
7	12x15	6	9 9/16	7	11	38.48
8	15x15	6	10 1/6	8	12 5/8	50.26
9	15x18	6	10 5/16	9	14 3/16	63.1
10	16x20	6	10 9/16	10	15 3/4	78.53
12	20x24	6	10 1/2	12	18 7/8	113.09
14	22x24	6	10	17	18 1/2	153.98

FEATURES:

- Quality constructed from heavy-duty 28-26 Gauge Galvanized steel, depending on size.
- This model is built with a 6 inch clearance between the flange and the bottom of the hood, typically preferred for use on flat, low pitched or tile roofs.
- Great for attic (static) ventilation and can be used with most roofing materials.
- Helps eliminate attic moisture and heat build-up.
- Works best when used with soffit or gable end venting.
- Comes with a built in 1/8 inch screen.



FEATURES:

- Quality constructed from heavy-duty 28-26 gauge Galvanized Steel, depending on size.
- This model has an oversized base typically used on shake style roofs.
- Great for attic (static) ventilation and can be used with most roofing materials.
- Provides a low silhouette and is open on two sides for better air flow.
- Helps eliminate attic moisture and heat build-up.
- Works best when used with soffit or gable end venting.
- Comes with a built in 1/8 inch screen.




J VENT WITH SHAKE BASE

(ITEM)(SIZE)(COLOR) **EXAMPLE:** JVS3G = JVS (ITEM) - 3" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

JVSB J-Vent with Shake Base

COLOR: G  BR  BK 

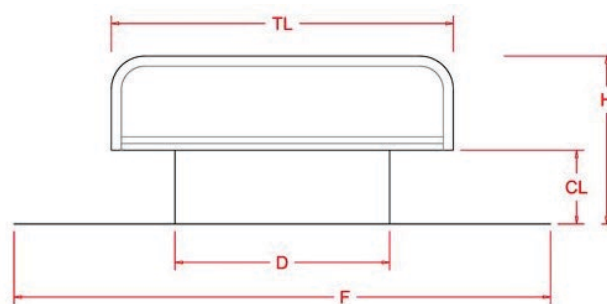

D	F	CL	H	TW	TL	Free Area
3	10x10	2 1/2	3 7/8	3	5	7.06
4	15x15	2 1/2	4 1/4	4	6 3/8	12.56
5	16x16	2 1/2	5 5/16	5	8	19.63
6	18x18	2 1/2	5 5/8	6	9 1/2	28.27
7	18x18	2 1/2	5 9/16	7	11	38.48
8	18x18	2 1/2	6 1/16	8	12 5/8	50.26
9	18x18	2 1/2	6 5/16	9	14 3/16	63.61
10	22x22	2 3/4	7 5/16	10	15 3/4	78.53
12	24x24	3 1/4	7 3/4	12	18 7/8	113.09
14	26x26	3 3/4	7 3/4	17	18 1/2	153.93



POLYMER ROOF VENT WITH 50 SQ IN NET FREE AREA


(ITEM)(SIZE)(COLOR) **EXAMPLE:** FA50BK= FA50(ITEM) - BLACK (MATERIAL/COLOR)

ITEM:

FA50 Polymer Roof Vent with 50 SQ IN Net Free Area

SIZE : 50 SQ IN

COLOR: BR  BK 

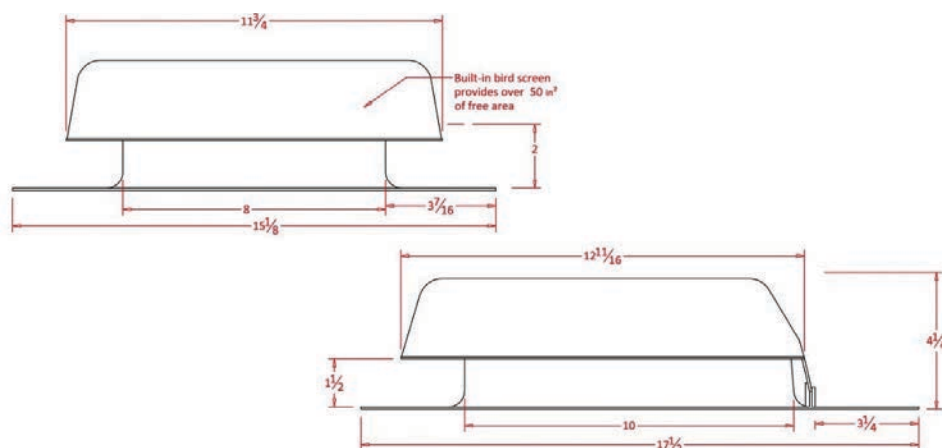

ROOF VENT WITH 38 SQ IN NET FREE AREA


(ITEM)(SIZE)(COLOR) **EXAMPLE:** JVO38BK= JVO38 (ITEM) - BLACK (MATERIAL/COLOR)

ITEM:

JVO38 Roof Vent with 38 SQ IN Net Free Area

SIZE : 38 SQ IN

COLOR: CU  G  WH  GR  BR  BK 

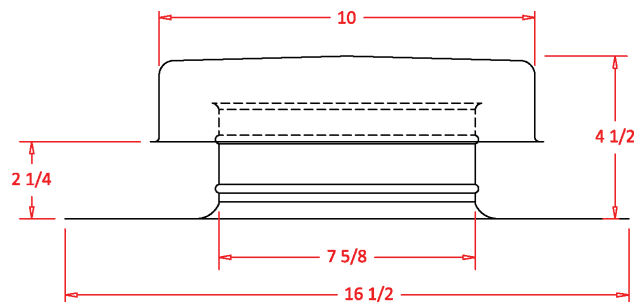

FEATURES:

- Quality constructed from high density polyethylene (HDPE).
- Contains UV inhibitors which help protect the material from deteriorating in the sunlight.
- Perfect for attic ventilation, this vent features a 50 square inch opening.
- Works best when used with a soffit or gable end venting.
- Flange measuring 15 1/8 inches x 17 1/2 inches with an inner opening of 8 x 10 inches.

FEATURES:

- Quality constructed in 28 gauge 16 ounce Copper and 28 gauge Galvanized Steel.
- Pre-painted steel color options are black, brown, white, and gray.
- Features 38 square inches of open space, insect screen, low silhouette and removable hood.
- Open on all four sides for better air flow and unrestricted venting to help eliminate moisture and heat built-up.

FEATURES:

- Quality constructed from heavy-duty 16 ounce, 24 gauge Copper, heavy-duty 28 gauge Galvanized Steel or heavy-duty 26 gauge Stainless Steel.
- All-weather (seamless) chimney cap to keep rain and snow from getting down the chimney pipe.
- Designed to be mounted over single wall pipe and comes with a draw bolt collar for a secure fit.
- Copper and Stainless Steel comes for single wall pipe sizes ranging from 3 inch to 12 inch outside diameter (not designed for double/triple wall pipe sizes).
- Galvanized available for single wall pipe sizes ranging from 3 inch to 18 inch outside diameter (not designed for double/triple wall pipe sizes).
- Galvanized - sizes 16 inch and up are not able to be built with an adjustable drawbolt band and are manufactured with a fixed size base.





CONE TOP CHIMNEY CAP

(ITEM)(SIZE)(COLOR) **EXAMPLE:** CT4SS= CT (ITEM) - 4" (SIZE) - STAINLES STEEL (MATERIAL/COLOR)

ITEM:

CT Cone Top Chimney Cap

COLOR: CU  G  SS 

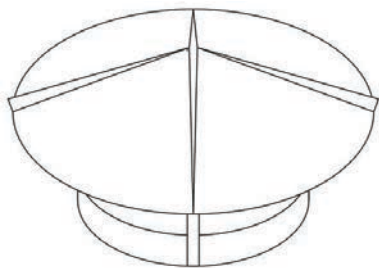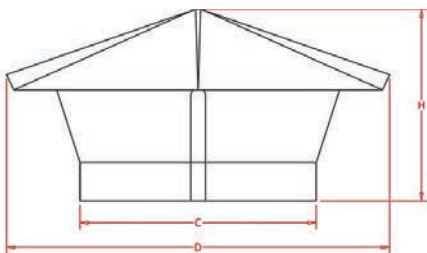

Size	W	L	H	Free Area
3	3	7	5 1/4	7.07
4	4	7 7/8	5 3/4	12.57
5	5	9 7/8	6	19.63
6	6	11 1/8	6 3/8	28.27
7	7	12 1/2	7 1/2	38.48
8	8	12 1/2	7 1/2	50.26
9	9	14	8	63.62
10	10	15	8 1/2	78.54
12	12	19 1/2	10	113.10
14	14	21	10	153.94
16	16	21 1/2	10	201.06





CONE TOP CHIMNEY CAP WITH SCREEN

(ITEM)(SIZE)(COLOR) **EXAMPLE:** CTS4SS= CTS (ITEM) - 4" (SIZE) - STAINLESS STEEL (MATERIAL/COLOR)


ITEM:

CTS Cone Top Chimney Cap with Screen

COLOR: CU  G  SS 

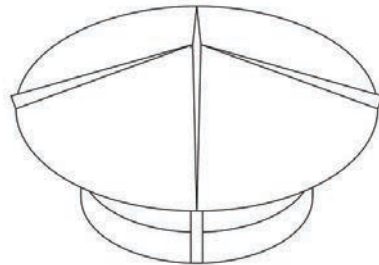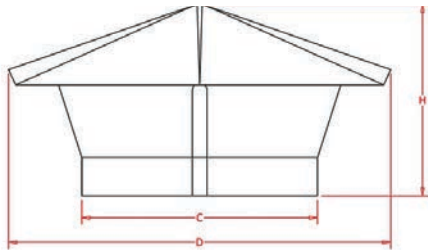

Size	W	L	H	Free Area
3	3	7	5 1/4	7.07
4	4	7 7/8	5 3/4	12.57
5	5	9 7/8	6	19.63
6	6	11 1/8	6 3/8	28.27
7	7	12 1/2	7 1/2	38.48
8	8	12 1/2	7 1/2	50.26
9	9	14	8	63.62
10	10	15	8 1/2	78.54
12	12	19 1/2	10	113.10
14	14	21	10	153.9400
16	16	21 1/2	10	201.06

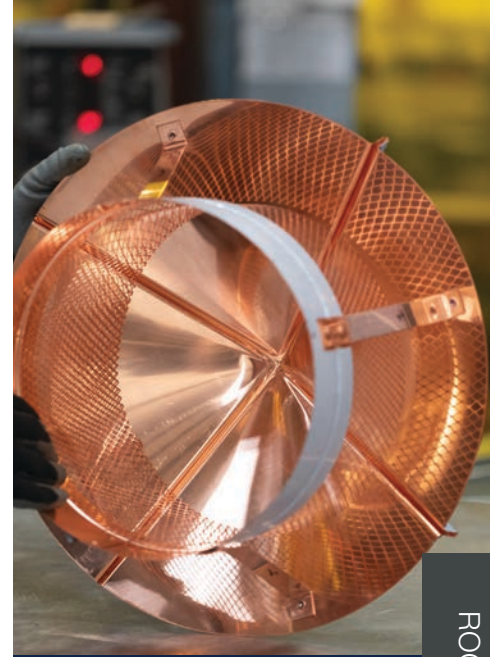

ROOF CAPS

FEATURES:

- Quality constructed from heavy-duty 16 ounce, 24 gauge Copper, heavy-duty 28 gauge Galvanized Steel or heavy-duty 26 gauge Stainless Steel.
- All-weather (seamless) chimney cap to keep rain and snow from getting down the chimney pipe.
- Designed to be mounted over single wall pipe and includes fixed base band with built in 1/4 inch screen (Not rated as a spark arrestor, consult your local building codes for chimney screen requirements before purchasing).

FEATURES:

- Quality constructed from heavy-duty 16 ounce, 24 gauge Copper, heavy-duty 28 gauge Galvanized Steel or heavy-duty 26 gauge Stainless Steel.
- Made to fit inside single and multi-wall chimney pipe, with oversized storm collar to protect the chimney.
- Cap has a one piece hood that is removable to make cleaning easier.




UNIVERSAL CHIMNEY CAP

(ITEM)(SIZE)(COLOR) **EXAMPLE:** UC6SS = UC (ITEM) - 6" (SIZE) - STAINLESS STEEL (MATERIAL/COLOR)

ITEM:

UC Universal Chimney Cap

COLOR: CU  G  SS 

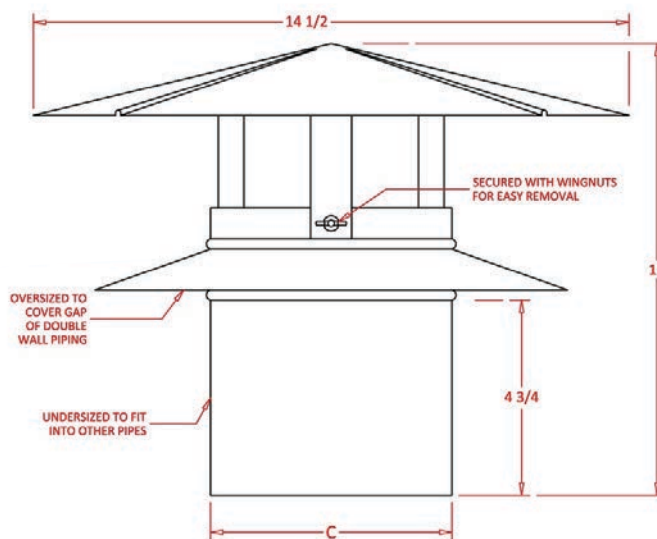

Size	C	Free Area IN ²
6	5 7/8	27.11
7	6 7/8	37.12
8	7 7/8	48.71




ROUND BASE CHIMNEY VACUUM CAP

(ITEM)(SIZE)(COLOR) **EXAMPLE:** VC8G = VC (ITEM) - 8" (SIZE) - GALVANIZED STEEL (MATERIAL/COLOR)

ITEM:

VC Round Base Chimney Vacuum Cap

COLOR: A  CU  G  SS 

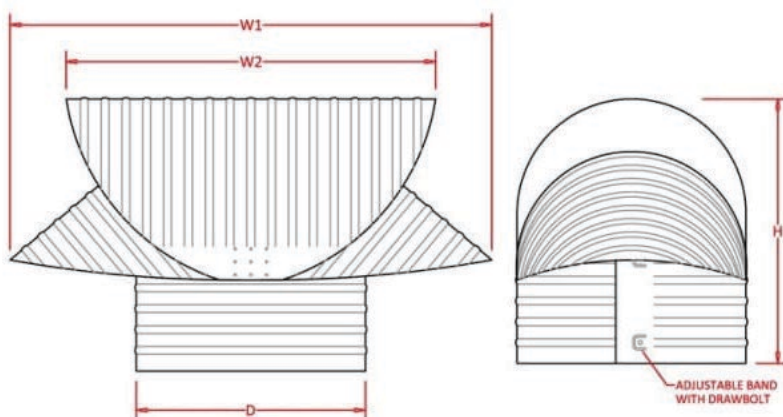

D	H	W1	W2
3	4 3/4	6	4 1/4
4	6 1/4	7 1/2	5 1/2
5	6 1/2	8 1/2	7
6	8	11	8 1/2
7	8 1/2	13	11
8	9 1/4	14	11 3/4
9	9 1/2	16	13 1/2
10	11 3/4	19	16 1/2
12	11 3/4	21 1/2	17 1/2
14	14	31	27
16	15	34	30

FEATURES:

- Quality constructed from heavy-duty 26 gauge Stainless Steel, heavy-duty Aluminum, .020–.025 depending on size, heavy-duty 16 ounce, 24 gauge Copper or heavy-duty Galvanized Steel, 28–24 gauge.
- Increases updraft and prevents downdrafts caused from wind by forcing the wind to alter its direction over one of four gores on the cap, creating a partial vacuum.
- Designed to be mounted over single wall pipe and comes with a draw bolt collar for a secure fit.
- Positioning of the cap relative to the prevailing winds is not critical, but is slightly more effective with the flat side facing the wind.
- Also available in Square Base as needed.

FEATURES:

- Quality constructed from 26 gauge Stainless Steel or 26 gauge Galvanized Steel.
- An economical gravity ventilator for use on residential, commercial and industrial applications.
- Features watertight construction and a low silhouette while offering positive draft for good airflow.
- This vent is not rated for any forced exhaust applications.
- This product uses our Flat Base round vent base on certain applications, which require a mounting flange.
- Available for pipe sizes ranging from 3 inch – 14 inch outside diameter.




GLOBE VENT

(ITEM)(SIZE)(COLOR) **EXAMPLE:** GVB10SS = GVB (ITEM) -10" (SIZE) - STAINLESS STEEL (MATERIAL/COLOR)

ITEM:

GVB Globe Vent

COLOR: G  SS 

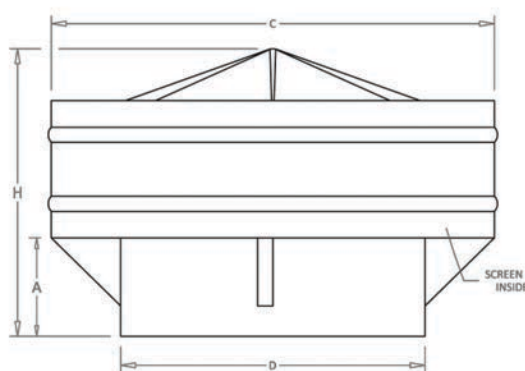

Size (IN)	A	C	D	H	Free Area IN ²
3	2	7	3	5 3/4	6.01
4	2	7	4	5 3/4	10.68
5	2 1/4	8	5	6 1/4	16.69
6	2 3/8	9	6	7	24.03
7	2 3/8	10 1/2	7	7 1/2	32.71
8	3	12	8	8	42.72
9	3	13	9	8 3/4	54.07
10	3 1/4	14 1/2	10	9 3/4	66.76
12	3 1/2	17	12	10 3/4	96.13
14	4 1/2	20	14	13	130.84
16	5	22 1/2	16	14 1/2	170.90
18	5 1/2	26	18	16	216.29






WIND DIRECTIONAL CHIMNEY CAP

(ITEM)(SIZE)(COLOR) **EXAMPLE:** WDC8SS = WDC (ITEM) -8" (SIZE) - STAINLESS STEEL (MATERIAL/COLOR)

ITEM:

WDC Wind Directional Chimney Cap

COLOR: G  SS 

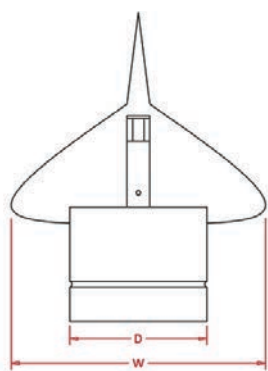

Size (IN)	D	H	W	Free Area IN ²
5	5	14 1/2	11	19.63
6	6	14 1/2	11	28.27
7	7	16	12	38.48
8	8	16 1/2	14	50.26
9	9	19	16	63.62
10	10	20	18	78.54
12	12	24	21	113.10
14	14	27	24	153.94


FEATURES:

- Quality constructed from heavy-duty 26 gauge Galvanized Steel or heavy-duty 26 gauge Stainless Steel.
- An effective solution to chimney downdraft in windy areas.
- Cap separates the wind stream as it flows over the cap, while the rotating hood is kept in proper position (relative to the wind) by the wind vane.
- Air movement past the hood creates a partial vacuum in the flue, enhancing draft efficiency and helping to prevent downdrafts.



FEATURES:

- Will allow the WDC & WDCSS wind directional chimney caps or any other round chimney cap, to mount onto a double or triple wall pipe.
- Quality constructed from heavy-duty 26 gauge Stainless Steel or Galvanized Steel.
- Connects to the same pipe size cap – ie; if you have a 6 inch ID pipe, you will want to order a 6 inch cap and 6 inch wind cap adapter.
- Fits inside an insulated, double or triple wall pipe, shielding the outer walls with oversized collar built into adapter.

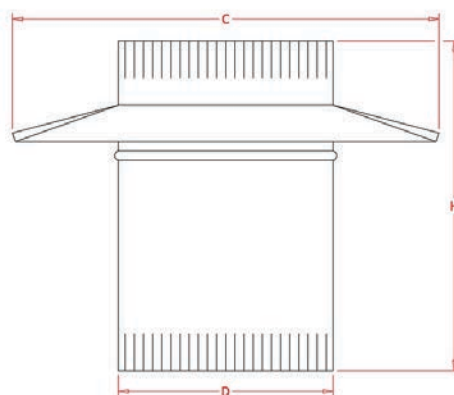

WIND CAP ADAPTER


(ITEM)(SIZE)(COLOR) **EXAMPLE:** WCA6SS= WCA (ITEM) - 6" (SIZE) - STAINLESS STEEL (MATERIAL/COLOR)

ITEM:

WCA Wind Cap Adapter

COLOR: G  SS 

Size	C	D	H	Free Area IN ²
5	10 3/4	4 7/8	9	18.67
6	11 3/4	5 7/8	9	27.11
7	12 3/4	6 7/8	9	37.12
8	13 3/4	7 7/8	9	48.71
9	14 3/4	8 7/8	9	61.86
10	15 3/4	9 7/8	9	76.59
12	17 3/4	11 7/8	9	110.75
14	19 3/4	13 7/8	9	151.20

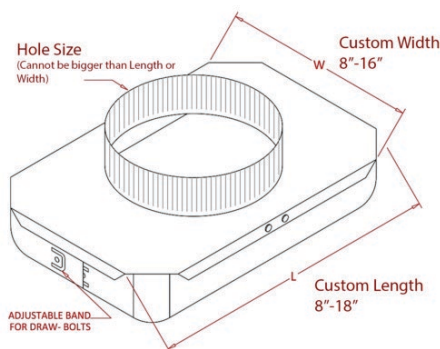

MASONRY TO METAL CHIMNEY TRANSITION

(ITEM)(SIZE)(COLOR) **EXAMPLE:** ATA10SS= ATA (ITEM) - 10" (SIZE) - STAINLESS STEEL (MATERIAL/COLOR)

ITEM:

ATA Masonry to Metal Chimney Transition

COLOR: G  SS 

FEATURES:

- Quality constructed from heavy-duty 26 gauge Stainless Steel or Galvanized Steel mill-finish.
- Diameter in inches of round opening at the top of the transition box (This cannot be larger than the length or width of the box)

Flue Tile Width (in inches) *

Outside width in inches across the flue tile (measured to the nearest 1/8th inch)

8"	9"	10"	11"	12"	13"	14"	15"	16"
8-1/8"	9-1/8"	10-1/8"	11-1/8"	12-1/8"	13-1/8"	14-1/8"	15-1/8"	
8-1/4"	9-1/4"	10-1/4"	11-1/4"	12-1/4"	13-1/4"	14-1/4"	15-1/4"	
8-3/8"	9-3/8"	10-3/8"	11-3/8"	12-3/8"	13-3/8"	14-3/8"	15-3/8"	
8-1/2"	9-1/2"	10-1/2"	11-1/2"	12-1/2"	13-1/2"	14-1/2"	15-1/2"	
8-5/8"	9-5/8"	10-5/8"	11-5/8"	12-5/8"	13-5/8"	14-5/8"	15-5/8"	
8-3/4"	9-3/4"	10-3/4"	11-3/4"	12-3/4"	13-3/4"	14-3/4"	15-3/4"	
8-7/8"	9-7/8"	10-7/8"	11-7/8"	12-7/8"	13-7/8"	14-7/8"	15-7/8"	


Flue Tile Length (in inches) *

Outside length in inches across the flue tile (measured to the nearest 1/8th inch)

8"	9-1/2"	11"	12-1/2"	14"	15-1/2"	17"
8-1/8"	9-5/8"	11-1/8"	12-5/8"	14-1/8"	15-5/8"	17-1/8"
8-1/4"	9-3/4"	11-1/4"	12-3/4"	14-1/4"	15-3/4"	17-1/4"
8-3/8"	9-7/8"	11-3/8"	12-7/8"	14-3/8"	15-7/8"	17-3/8"
8-1/2"	10"	11-1/2"	13"	14-1/2"	16"	17-1/2"
8-5/8"	10-1/8"	11-5/8"	13-1/8"	14-5/8"	16-1/8"	17-5/8"
8-3/4"	10-1/4"	11-3/4"	13-1/4"	14-3/4"	16-1/4"	17-3/4"
8-7/8"	10-3/8"	11-7/8"	13-3/8"	14-7/8"	16-3/8"	17-7/8"
9"	10-1/2"	12"	13-1/2"	15"	16-1/2"	18"
9-1/8"	10-5/8"	12-1/8"	13-5/8"	15-1/8"	16-5/8"	
9-1/4"	10-3/4"	12-1/4"	13-3/4"	15-1/4"	16-3/4"	
9-3/8"	10-7/8"	12-3/8"	13-7/8"	15-3/8"	16-7/8"	

FEATURES:

- Quality constructed from 28-24 gauge Galvanized Steel, depending on size.
- Used as a mount for a globe vent or any other round based roof vents without a flange.
- For mounting on flat roofs with no pitch or slope.
- Features a large flange for easy installation and leak protection.
- No field trimming required, has a weather-proof construction.
- Available in sizes that fit caps from 4 inch – 18 inch outside diameter (OD).

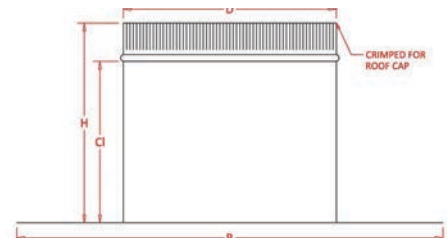

ROUND VENT BASE-FLAT ROOF

(ITEM)(SIZE)(COLOR) **EXAMPLE:** FB6= FB (ITEM) - 6" (SIZE)

ITEM:

FB Round Vent Base-Flat Roof

COLOR: G

Size	B	D	H	Cl	Free Area IN ²
3	12x12	3	5 1/2	4	7.07
4	12x12	4	5 1/2	4	12.57
5	15x15	5	5 1/2	4	19.63
6	15x15	6	7 1/2	6	28.27
7	15x15	7	7 1/2	6	38.48
8	16x16	8	7 1/2	6	50.26
9	18x18	9	9 3/4	8	63.62
10	18x18	10	9 3/4	8	78.54
12	20x20	12	9 3/4	8	113.10
14	24x24	14	9 3/4	8	153.94
16	26x26	16	9 3/4	8	201.06
18	28x28	18	9 3/4	8	254.47



FLAT SUB BASE 3 IN TALL- NO CRIMP


(ITEM)(SIZE)(COLOR) **EXAMPLE:** FB34= FB3 (ITEM) - 4" (SIZE)

ITEM:

FB3 Flat Sub Base 3 In Tall- No Crimp

COLOR: G

Vent Size (in)	D	Flange
4	3 3/4	10x10
8	7 3/4	14x14
10	9 3/4	16x16
12	11 3/4	18x18

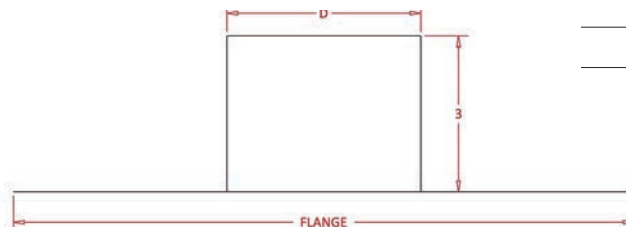

FEATURES:

- Quality constructed in 28 gauge Galvanized Steel.
- Leak Protection/ Weather proof.



ROUND VENT BASE- PITCHED


(ITEM)(SIZE)(COLOR) **EXAMPLE:** PB4= PB (ITEM) - 4" (SIZE)

ITEM:

PB Round Vent Base - Pitched

PITCH: Pitched Bases (Pitch Ranges 1/12 — 12/12)

COLOR: G

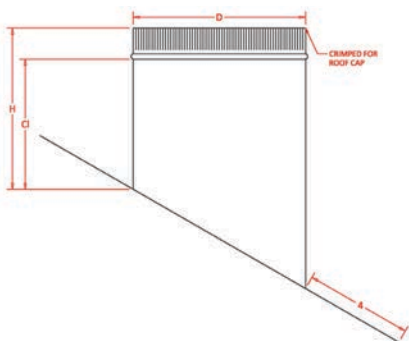

Size	D	H	CI	Free Area IN ²
4	4	5 1/2	4	7.07
6	6	7 1/2	6	12.57
8	8	7 1/2	6	19.63
10	10	9 3/4	8	28.27
12	12	9 3/4	8	38.48
14	14	9 3/4	8	50.26
16	16	9 3/4	8	63.62
18	18	9 3/4	8	78.54

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel with mill-finish.

Gauge Shape: Round

ROOF VENT BASES



ROUND VENT BASE-SADDLE


(ITEM)(SIZE)(COLOR) **EXAMPLE:** SB4= SB (ITEM) - 4" (SIZE)R

ITEM:

SB Round Vent Base-Saddle

PITCH: Pitched Bases (Pitch Ranges 1/12 — 12/12)

COLOR: G

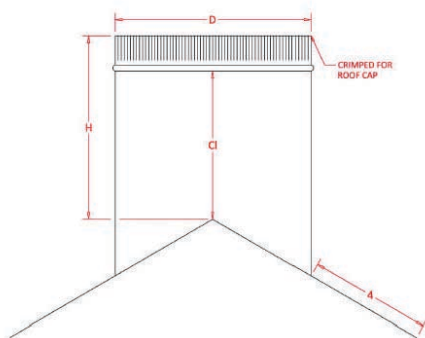


Size	DH	CI	Free Area IN ²
4	4	5 1/24	7.07
6	6	7 1/26	12.57
8	8	7 1/26	19.63
10	10	9 3/48	28.27
12	12	9 3/48	38.48
14	14	9 3/48	50.26
16	16	9 3/48	63.62
18	18	9 3/48	78.54

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel with mill-finish.

Gauge Shape: Round

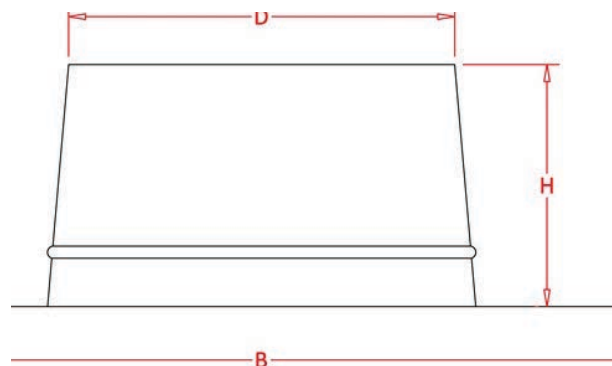

FEATURES:

- Quality constructed from 28 – 24 gauge Galvanized Steel, depending on size.
- Made to go over the pipe on a flat roof.
- Available for pipe sizes ranging from 1 inch – 24 inches.
- Only intended to shield the pipe, not designed as a mount for a cap, please see our FB round vent base for a cap-mounting option.

PIPE FLASHING- FLAT PITCH ROOF


(ITEM)(SIZE)(COLOR) **EXAMPLE:** FP4 = FP ITEM) - 4" (SIZE)

ITEM:

FP Pipe Flashing- Flat Pitch Roof

COLOR: G 

Size	B	D	H
1	12x12	1	5
1.5	12x12	1.5	5
2	12x12	2	5
2.5	12x12	2.5	5
3	12x12	3	5
4	14x14	4	5
5	15x15	5	5
6	16x16	6	5
7	16x16	7	5
8	18x18	8	5
9	18x18	9	5
10	18x18	10	6
12	22x22	12	6
14	24x24	14	8
16	30x30	16	8
18	30x30	18	8

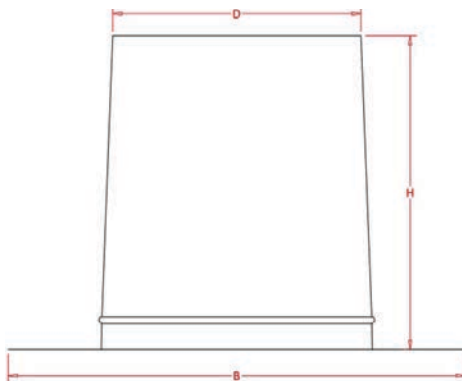

TALL PIPE FLASHING - FLAT PITCH ROOF

(ITEM)(SIZE)(COLOR) **EXAMPLE:** TFP3= TFP (ITEM) - 3" (SIZE)

ITEM:

TFP Tall Pipe Flashing- Flat Pitch Roof

COLOR: G 

Size	B	D	H
3	14x14	3	12
4	15x15	4	12
5	15x15	5	12
6	16x16	6	12
7	18x18	7	12
8	18x18	8	12
9	20x20	9	12
10	22x22	10	12
12	22x22	12	12
14	24x24	14	12
16	31x31	16	12
18	33x33	18	12


FEATURES:

- Quality constructed from 28 – 24 gauge Galvanized Steel, depending on size.
- Made to go over the pipe on a flat roof.
- Only intended to shield the pipe, not designed as a mount for a cap, please see our FB round vent base for a cap-mounting option.
- Includes a 12 inch rise



FEATURES:

- Quality constructed from 28 gauge Galvanized Steel.
- Available for pipe sizes ranging from 1-1/2" to 14".
- Flexible cone allows for this flashing to be used on 1/12 up to 6/12 pitched roofs.

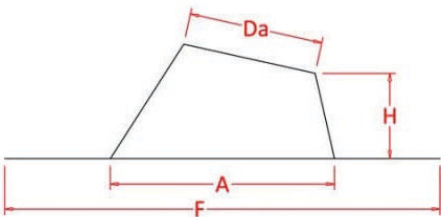

PIPE FLASHING- ADJUSTABLE 1-6/12 PITCH



(ITEM)(SIZE)(COLOR) **EXAMPLE:** G2.5 = G (ITEM) - 2.5" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

G Pipe Flashing- Adjustable 1-6/12 Pitch

COLOR: G 

Nominal	Actual			
Dn	Da	H	F	A
0.5	0.63	4	12x12	3.0
1	1.13	4	12x12	3.7
1.5	1.63	4	12x12	4.2
2	2.13	4	14x14	4.8
2.5	2.63	4	14x14	5.3
3	3.13	4	15x15	6.8
4	4.13	4	16x16	8.1
5	5.13	4	18x18	9.2
6	6.18	4	20x20	10.3
7	7.18	4	20x20	11.4
8	8.19	4	22x22	12.5
9	9.19	4	24x24	13.6
10	10.19	4	24x24	15.3
12	12.25	4	26x26	17.5
14	14.25	5	30x30	20.3

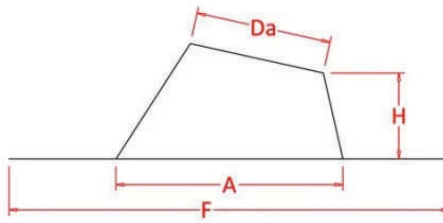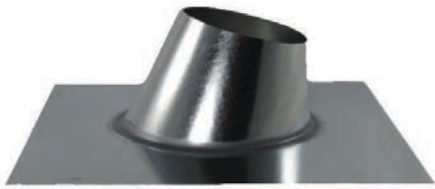

B-VENT PIPE FLASHING- ADJUSTABLE 1-6/12 PITCH



(ITEM)(SIZE)(COLOR) **EXAMPLE:** GB4.5= GB (ITEM) - 4.5" (SIZE)

ITEM:

GB Galvanized Wall Vent – Reversible Backdraft Damper

COLOR: G

Nominal	Actual			
Dn	Da	H	F	A
3.5	3.68	4	16x16	8.1
4.5	4.68	4	18x18	9.2
5.5	5.68	4	20x20	10.3
6.5	6.68	4	20x20	11.4
7.5	7.75	4	22x22	12.5
8.5	8.75	4	24x24	13.6
11	11.25	4	26x26	16.4
13	13.25	4	28x28	18.6
15	15.25	6	32x32	21.9

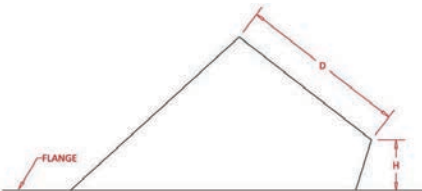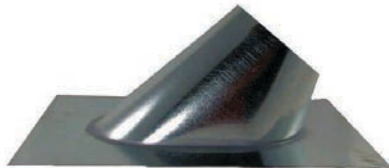

B-VENT PIPE FLASHING- ADJUSTABLE STEEP 7-12/12 PITCH

(ITEM)(SIZE)(COLOR) **EXAMPLE:** GHB4.5= GHB (ITEM) - 4.5" (SIZE)

ITEM:

GHB B-Vent Pipe Flashing- Adjustable Steep 7-12/12 Pitch Range

COLOR: G

Size	D	H	FLANGE
3.5	3 5/8	4	14 13/16x19 13/16
4.5	4 11/16	4	14 13/16x19 13/16
5.5	5 11/16	4	16 13/16x22
6.5	6 11/16	4	16 13/16x22
7.5	7 3/4	4	18 13/16x24 13/16
8.5	8 3/4	4	18 13/16x24 13/16
11	11 1/4	4	22x30
13	13 1/4	4	24x24

FEATURES:


- Quality constructed from 28 gauge Galvanized Steel.
- Available for common B-vent or B-vent Double Wall pipe sizes ranging from 3 5/8 inch up to 12 inch ID (13 inch OD).
- Flexible cone allows for this flashing to be used on 1/12 up to 6/12 pitched roof.

Double Wall Pipe Flashing
(Pitch Range 1-6/12)

FEATURES:

- Quality constructed from 28 gauge Galvanized Steel.
- Adjustable is made for 7-12/12 pitched roofs.

Double Wall Pipe Flashing
(Pitch Range 7/12-12/12)

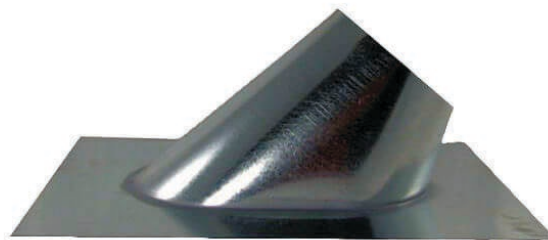

PIPE FLASHING- ADJUSTABLE STEEP 7/12-12/12 PITCH

FEATURES:

- Quality constructed from 28 gauge Galvanized Steel.
- Available for pipe sizes ranging from 1-1/2" to 14".
- Flexible cone allows for this flashing to be used on 7/12 up to 12/12 pitched roofs.
- Pipe Flashing (Pitch Range 7/12-12/12)


(ITEM)(SIZE)(COLOR) **EXAMPLE:** GH6= GH (ITEM) - 6" (SIZE)

ITEM:

GH Pipe Flashing- Adjustable Steep 7-12/12 Pitch Range

COLOR: G 

Size	D	H	FLANGE
2	2 1/8	4	13x13
3	3 1/8	4	15x15
4	4 1/8	4	15x16
5	5 1/8	4	16x18
6	6 3/16	4	18x20
7	7 3/16	4	18x20
8	8 3/16	4	19x25
9	9 3/16	5	20x24
10	10 3/16	5	21x26
12	12 1/4	5	24x30
14	14 1/4	5	29x34

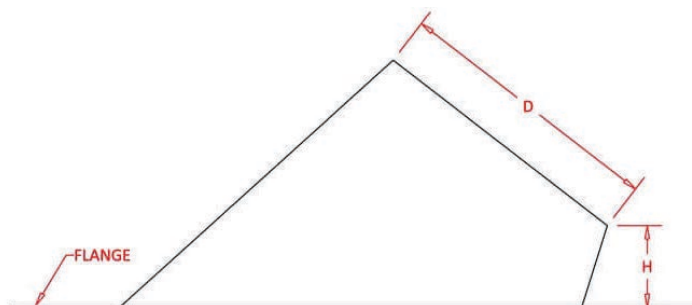



CRICKET FLASHING


(ITEM)(SIZE)(COLOR) EXAMPLE: CF4 = CF (ITEM) - 4" (SIZE)

ITEM:

CF Cricket Flashing

COLOR: G 

Size	Diameter Ranges
1 1/2 & 2	0 - 2
3 & 4	2 - 4

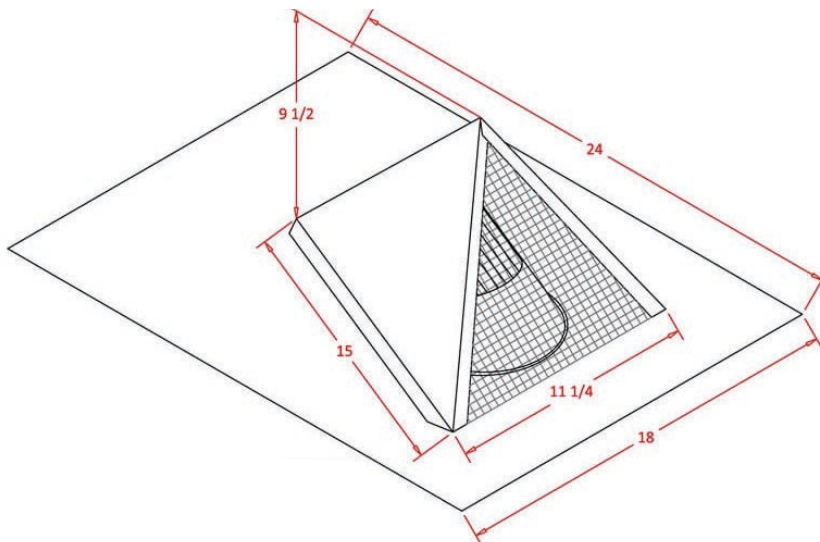

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel.
- Designed to split snow and prevent it from damaging pipes and other roof protrusions, specifically for protecting piping from snow, also known as a "snow splitter".
- Features a large flange for easy installation and leak protection.
- For use on small diameter PVC pipe vents.
- Sized to fit over a 2 inch or 4 inch pipe. Adjustable from 0-8/12 pitch.



MAKE-UP AIR

MAKE-UP AIR

FAMCO® is meeting the challenge of how to deliver fresh air while also improving comfort and safety through our Make-up Air and zoning products. Available with manual, pressure relief, spring-loaded or motorized dampers, our Make-up Air products will elevate indoor air quality in any home.

MAKE-UP AIR

MAKE-UP AIR



Heavy Duty Switch

MUHDS

Sizes: 4", 6", 8", 10"



Adjustable Switch

MUAS

Sizes: 4", 6", 8", 10"



Universal Relay with Current Switch

MUUS


Sizes: 4", 6", 8", 10"



Pressure Sensor

MUPSS

Sizes: 4", 6", 8", 10"

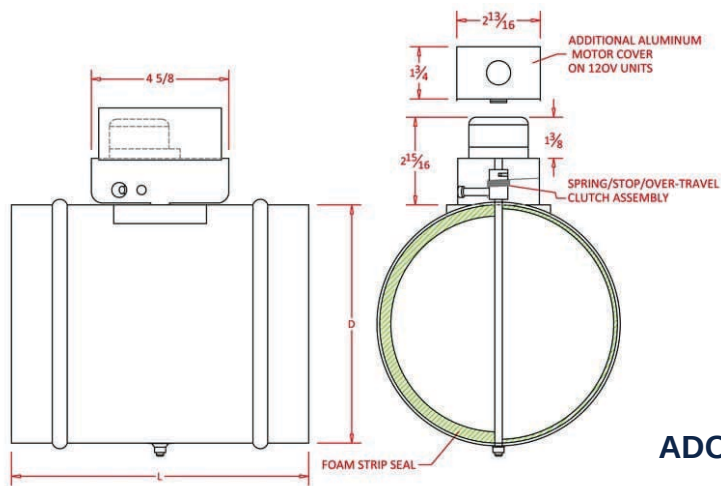

ADO/ADC

FEATURES:

- Quality constructed in 28 gauge Galvanized Steel.
- Made with 24 volt or 120 volt motors.
- End switches are available with all models.

MOTORIZED HVAC DAMPER

(ITEM)(SIZE)(VOLTAGE) **EXAMPLE:** ADO424= ADO (ITEM) - 4" (SIZE) - 24 VOLTS (VOLTAGE)

ITEM:



ADO Motorized Damper Normally Open/ **POWER CLOSED**

ADC Motorized Damper Normally Closed/ **POWER OPEN**

COLOR: G

Size	D	L
4	4	10
5	5	10
6	6	10
7	7	10
8	8	10
10	10	10
12	12	12
14	14	14
16	16	16



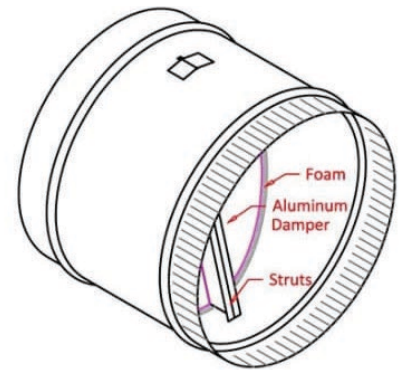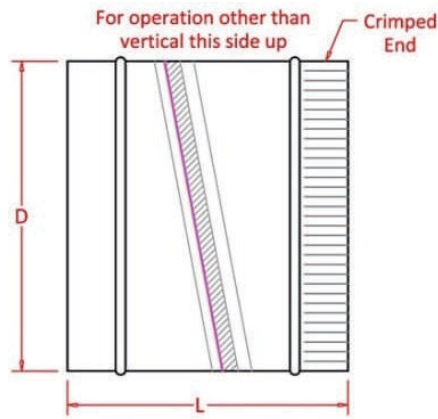

BACKDRAFT/ BUTTERFLY DAMPER

(ITEM)(SIZE)(COLOR) **EXAMPLE:** BD4 = BD (ITEM) -4" (SIZE)

ITEM:

BD Backdraft/ Butterfly Damper

COLOR: G

Size	D	L
4	4	6
5	5	6
6	6	6
7	7	7 1/4
8	8	7 1/4
9	9	7 1/4
10	10	7 1/4
12	12	9
14	14	12
16	16	14
18	18	18
20	20	18

FEATURES:

- Quality constructed from heavy-duty Galvanized Steel: 28-22 gauge
- Used as a backdraft damper for heat exchangers, exhaust systems, solar heating systems and other intake or exhaust applications where a powered damper is not needed, this product is not rated for use with a dryer.
- Works in both horizontal or upward air flow positions and the foam seal provides minimal air leakage.
- Opens easily with normal air flow and closes with gravity, due to the specially designed angled aluminum damper blades.

MAKE-UP AIR





FEATURES:

- Quality constructed in 28 gauge Galvanized Steel to fit inside round dampers
- Opens easily with normal air flow and closes with gravity, due to the specially designed angled aluminum damper blades.
- Works in both horizontal or vertical positions.
- Foam seal provides minimal air leakage.




INLINE SPRING-LOADED BACKDRAFT/ BUTTERFLY DAMPER

(ITEM)(SIZE)(COLOR) **EXAMPLE:** BDS4= BDS (ITEM) - 4" (SIZE)

ITEM:

BDS Inline Spring-Loaded Backdraft/ Butterfly Damper

COLOR: G

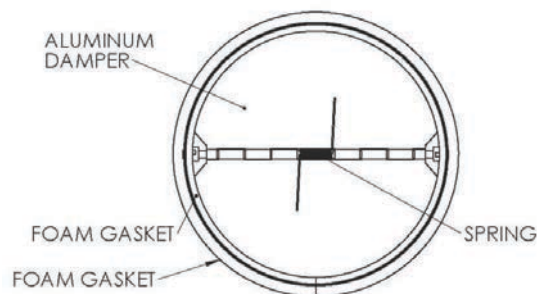

Size	DIA
4	3 5/8
5	4 5/8
6	5 5/8
7	6 5/8
8	7 5/8
10	9 5/8



PRESSURE RELIEF BAROMETRIC DAMPER




(ITEM)(SIZE)(COLOR) **EXAMPLE:** PRD5= PRD (ITEM) - 5" (SIZE)

ITEM:

PRD Pressure Relief Barometric Damper

COLOR: G

Size (in)	D	L	Damper Rod	Free Area IN ²
5	4 7/8	6	6 3/8	8.95
6	5 7/8	7	7 3/8	15.03
7	6 7/8	8	8 3/8	22.69
8	7 7/8	9	9 3/8	31.92
10	9 7/8	11	11 3/8	69.03
12	11 7/8	13	13 3/8	84.54
14	13 7/8	15	15 3/8	120.27
16	15 7/8	17	17 3/8	162.29
18	17 7/8	19	19 3/8	210.59
20	19 7/8	21	21 3/8	265.17

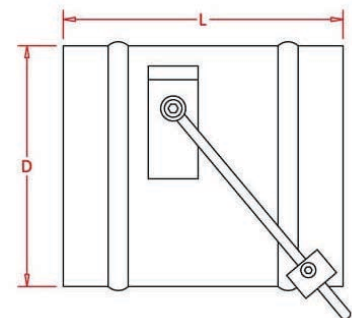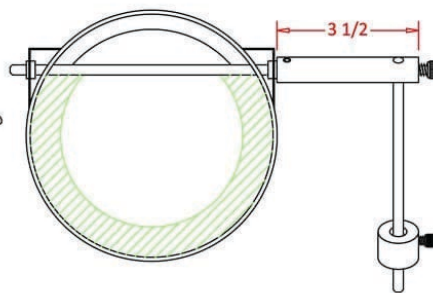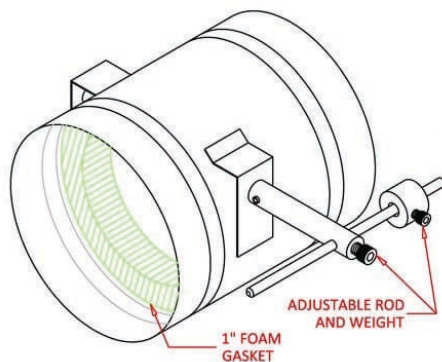

FEATURES:

- Quality constructed from heavy-duty Galvanized Steel, 24-22 gauge, depending on size.
- Commonly used to relieve built up pressure in zoned duct system.
- Sliding weight can be adjusted to open when a certain pressure is reached.

MAKE-UP AIR



POLYMER

While we love metal, it may not be right for all applications.

For applications demanding flexibility and performance, FAMCO® has developed a family of polymer-based vents.

Designed specifically for form and function, these plastic vents are durable against weather infiltration and uv rays that can otherwise lead to discoloration and deterioration of the vent with the added benefit of being economical.

FAMCO® offers many paintable colors and designs in its' plastic offering to meet your application needs.

Check out the roof and wall vent section to learn more.





DAMPER MOTOR



(ITEM)(SIZE)(COLOR) **EXAMPLE:** DM24.5= DM (ITEM) - 24 (VOLTAGE) - .5 (RPM)

ITEM:

DM Damper Motor

VOLTAGE: 24 Volt and 120 Volt

RPM: 1 RPM and 1/2 RPM



DUCT INCREASER / REDUCER

(ITEM)(SIZE)(COLOR) **EXAMPLE:** IR34G = IR (ITEM) - 3" (IN SIZE) 4" (OUT SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

IR Duct Increaser / Reducer

COLOR: A  G 

Out	In										
	3	4	5	6	7	8	9	10	12	14	16
4	X										
5	X	X									
6	X	X	X								
7	X	X	X	X							
8	X	X	X	X	X						
9				X	X	X					
10				X	X	X	X				
12				X	X	X	X	X			
14							X	X	X		
16								X	X	X	
18									X	X	X

FEATURES:


- Designed as a replacement motor for the FAMCO ADO & ADC motorized dampers.
- Comes in a few variations available to fit specific needs.
- We strongly recommend ordering this motor with the assembly for ease of replacement on the damper unit.
- Available in both 24 volt or 120 volt, an option with an end switch also available to wire to an additional appliance to be controlled by the damper.

FEATURES:

- Quality constructed in heavy-duty 26 gauge Galvanized Steel or heavy-duty .020 Aluminum.
- Maintains the CFM rate and maximizes air flow in longer duct runs by decreasing the duct size.
- Best used in tighter spaces with low air volume.

FEATURES:

- Reduces the pipe fitting from 4 inches to 3 inches for dryer venting or bath fan venting systems

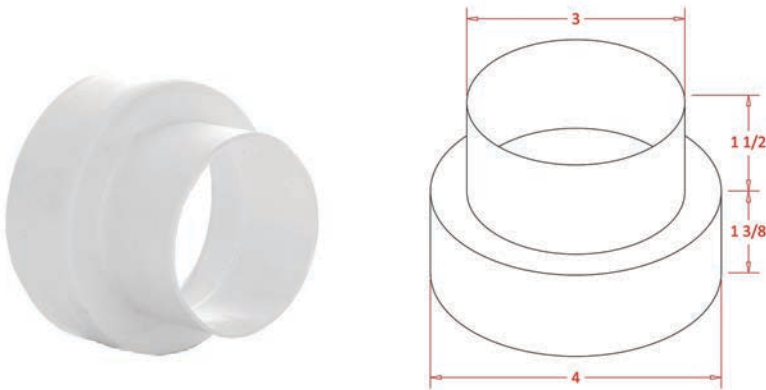

POLYMER INCREASER/ REDUCER


(ITEM)(SIZE)(COLOR) **EXAMPLE:** UEV34RWH = UEV (ITEM) - 34 (SIZE) R (REDUCER) - WHITE (MATERIAL/COLOR)

ITEM:
UEV34RWH Polymer Increaser/ Reducer
 SIZE: 4" TO 3"
 COLOR: WH ☐



FEATURES:

- Quality constructed from heavy-duty 26 gauge Galvanized Steel.
- Designed to reduce the duct size of a forced air run in a short transition.
- By gradually decreasing the duct size, the tapered reducer maintains the CFM rate in the run and maximizes air flow..

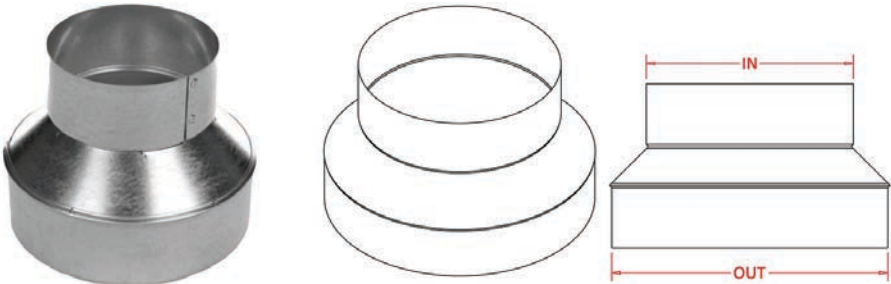


TAPERED DUCT REDUCER

(ITEM)(SIZE)(COLOR) **EXAMPLE:** TR34 = TR (ITEM) - 3" (IN SIZE) 4" (OUT SIZE)

ITEM:
TR Tapered Duct Reducer
 COLOR:G ☐

Out	In										
	3	4	5	6	7	8	9	10	12	14	16
4	X										
5	X	X									
6	X	X	X								
7	X	X	X	X							
8	X	X	X	X	X						
9				X	X	X					
10				X	X	X	X				
12				X	X	X	X	X			
14							X	X	X		
16								X	X	X	
18									X	X	X



PLUG REDUCER- CRIMPED

(ITEM)(SIZE)(COLOR) **EXAMPLE:** PR34= PR (ITEM) - 3" (IN SIZE) - 4" (OUT SIZE)

ITEM:

PR Plug Reducer- Crimped

COLOR: G 

Out	In											
	3	4	5	6	7	8	9	10	12	14	16	
4	X											
5	X	X										
6	X	X	X									
7	X	X	X	X								
8	X	X	X	X	X							
9				X	X	X						
10				X	X	X	X					
12				X	X	X	X	X				
14							X	X	X			




SQUARE TO ROUND TRANSITION BOX

(ITEM)(SIZE)(COLOR) **EXAMPLE:** SDB8 = SDB (ITEM) - 8" (SIZE)

ITEM:

SDB Square to Round Transition Box

COLOR: G 

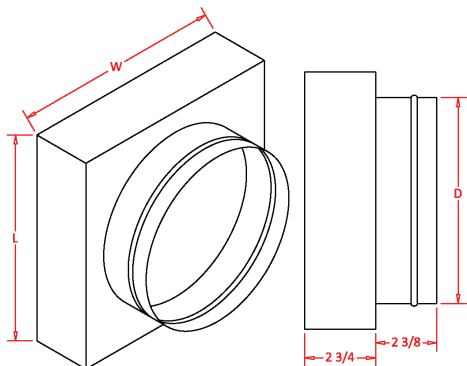

Square to Round Diffuser

W	L	D
6	6	3,4,5,6
8	8	5,6,7,8
8	10	5,6,7,8
10	10	7,8,9,10
8	12	5,6,7,8
10	12	7,8,9,10
12	12	9,10,11,12
8	14	5,6,7,8
10	14	7,8,9,10
15	15	12,13,14,15
16	16	13,14,15,16
18	18	15,16,17,18

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel.
- Crimped plug with a reducing end used in tight spaces with low air pressure.




FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel.
- Primarily for use to attach a ceiling register to your air supply.
- Can be used in many applications that transition a square duct to round duct.

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel.
- This product attaches to the wall before the stucco is applied to create a smooth inset surface for mounting an exterior wall vent.
- Come for wall vent pipe sizes 3 inch – 12 inch.

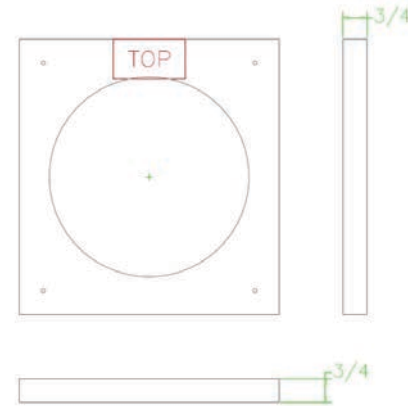

STUCCO TRIM FOR ROUND WALL VENTS

(ITEM)(SIZE)(COLOR) **EXAMPLE:** SRR8 = SRR (ITEM) - 8" (SIZE)

ITEM:


SRR Stucco Trim for Round Wall Vents

SIZE: 3" | 4" | 5" | 6" | 7" | 8" | 10" | 12"

COLOR: G

FEATURES:

- Quality constructed from heavy-duty 26 gauge Galvanized Steel or .020 gauge Aluminum.
- Designed to cap off or terminate the end of a pipe.
- This flue cap has no crimp and is installed over the outside of the pipe, see our GPA flue plug with crimp for a solution that goes inside of the pipe.



FLUE CAP

(ITEM)(SIZE)(COLOR) **EXAMPLE:** FC8G = FC (ITEM) - 8" (SIZE) - GALVANIZED (MATERIAL/COLOR)


ITEM:

FC Flue Cap

SIZE : 3" | 4" | 5" | 6" | 7" | 8" | 9" | 10" | 12" | 14" | 16" | 18" | 20"

COLOR: A G

*Be sure to verify your measurements before ordering

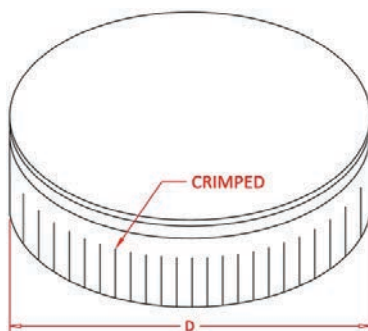

FLUE PLUG WITH CRIMP

(ITEM)(SIZE)(COLOR) **EXAMPLE:** GP5= GP (ITEM) - 5" (SIZE) - GALVANIZED (MATERIAL/COLOR)

ITEM:

GP Flue Plug with Crimp

COLOR: A  G 

Size	D	Size	D
3	2 7/8	8	7 7/8
4	3 7/8	9	8 7/8
5	4 7/8	10	9 7/8
6	5 7/8	12	11 7/8
7	6 7/8	14	13 7/8
		16	15 7/8



STORM COLLAR

(ITEM)(SIZE)(COLOR) **EXAMPLE:** SCB4 = SCB (ITEM) - 4.625" (SIZE)

ITEM:

SC Storm Collar

SCB Storm Collar for B-Vent

COLOR: G 

Item	Size	Item	Size
SC3	3	SCB7	7.625
SCB3	3.625	SC8	8
SC4	4	SCB8	8.625
SCB4	4.625	SC9	9
SC5	5	SC10	10
SCB5	5.625	SC12	12
SC6	6	SC14	14
SCB6	6.625	SC16	16
SC7	7	SC18	18

FEATURES:


- Quality constructed from heavy-duty 28 gauge Galvanized Steel or .020 Aluminum.
- Designed to cap off or terminate the end of a pipe.
- Has an undersized crimped end and is installed on the inside of the pipe.
- Available for inside diameter (ID) pipe sizes ranging from 3 inch – 18 inch, be sure to verify your measurements before ordering.

FEATURES:

- Quality constructed from heavy-duty 26 gauge Galvanized Steel.
- Used with FAMCO metal pipe flashings to divert water from running down the pipe and comes equipped with an adjustable tab.
- Available for OD pipe sizes from 3 6/8 inch – 19 inch. Please note: all sizes will have a 2 inch wide collar.
- Storm Collar/ Storm Collar B Vent available for OD pipe sizes from 3 inch – 24 inch. Please note: all sizes will have a 2 inch wide collar.



STARTER COLLAR

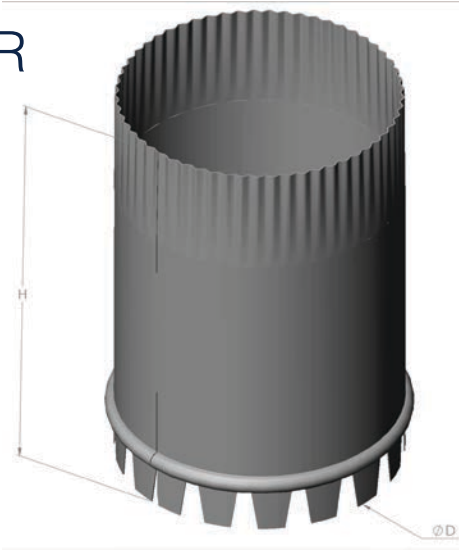

FEATURES:

- Made from 28 gauge Galvanized Steel.


(ITEM)(SIZE)(COLOR) **EXAMPLE:** STARTC4 = STARTC (ITEM) - 4" (SIZE)

ITEM:
STARTC Starter Collar
COLOR: G 

Size	H	D
4	6"	4"
5	6"	5"
6	6"	6"
8	6"	8"
10	6"	10"
12	6"	12"
14	6"	14"

FEATURES:

- Quality constructed from heavy-duty 28 gauge Galvanized Steel or heavy-duty .020 Aluminum.
- Used with FAMCO wall vents as a beauty ring or trim collar to cover the cut-out hole (on the inside wall).
- Gives the installed vent a finished look and the hold around the pipe a more aesthetic appeal, tightly fitted for security.
- Available for pipe sizes from 3 inch – 12 inch.

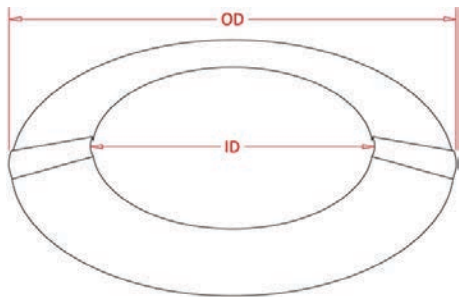

WALL VENT COLLARS

(ITEM)(SIZE)(COLOR) **EXAMPLE:** WVC6 = WVC (ITEM) - 6" (SIZE)

ITEM:
WVC Wall Vent Collars
COLOR: G 

*Be sure to verify your measurements before ordering

Size	W	H
3	3	6 1/8
4	4	7 1/8
5	5	8 1/8
6	6	9 1/8
7	7	10 1/8
8	8	11 1/8
9	9	12 1/8
10	10	13 1/8
12	12	15 1/4
14	14	17 1/4

ACCESSORIES



POLYMER VENT GUARD

(ITEM)(SIZE)(COLOR) **EXAMPLE:** VG4WH = VG (ITEM) - 4" (SIZE) - WHITE POLYMER (MATERIAL/COLOR)

ITEM:

VG4 Polymer Vent Guard

SIZE: 4" | For Use With LH 4" Wall Vents with Movable Louvers

COLOR: WH ☐ BR ☐



VENT SCREEN 6 INCH X 100 FOOT

ITEM:

VM6 Vent Screen 6 Inch X 100 Foot

COLOR: A ☐

(ITEM)(SIZE)(COLOR) **EXAMPLE:** VM6 = VM (ITEM) - 6" (SIZE) - ALUMINUM (MATERIAL/COLOR)

NAIL PLATE

(ITEM)(SIZE)(COLOR) **EXAMPLE:** NP218 = NP (ITEM) - 2x18" (SIZE)

ITEM:

NP Nail Plate

DIMENSIONS: 2x18in and 2x24in

COLOR: G ☐



FEATURES:

- This product is made for use with FAMCO LH4 plastic wall vent with movable louvers, sold separately.
- Made of high density polyethylene plastic (HDPE) for durability and longevity.
- Helps to prevent unwanted pests from entering the duct or home and has a click-in compatibility for easy installation/removal.

FEATURES:

- Aluminum Perma Kote 1/8 inch vent screen.
- Roll measures measured 6 inches x 100 feet.
- Easily trimmed to desired length.

FEATURES:

- Quality constructed from heavy-duty 16 gauge Galvanized Steel.
- Used to re-secure and strengthen wood framing after pipe installation within a framed wall.
- Minimum purchase quantity of 10 units.



FEATURES:

- . Quality constructed from heavy-duty 28 gauge galvanized steel.
- . Easy filter access with use of snap clips and simplified “door”.
- . Made to hold a 4 inch furnace filter – smaller filters can be used, although you will need to secure the filter using spacers at the corners to prevent them from moving in the slot, these are not provided with this product.
- . For an option with removable channels for multiple filter sizes, see our FRB filter rack base.




FURNACE FILTER RACK

(ITEM)(SIZE)(COLOR) **EXAMPLE:** FR1420= FR (ITEM)- 14x20" (SIZE)

ITEM:
FR Furnace Filter Rack
 COLOR: G

Size	H	L
1420	14	20
1425	14	25
1620	16	20
1625	16	25
1820	18	20
1825	18	25
2020	20	20
2025	20	25

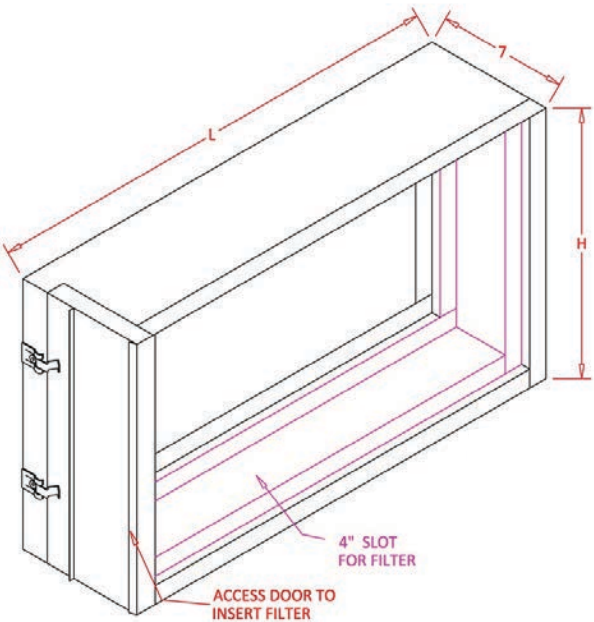



FURNACE FILTER RACK BASE

(ITEM)(SIZE)(COLOR) **EXAMPLE:** FRB1420 = FRB (ITEM) - 14x20" (SIZE)


ITEM:

FRB Furnace Filter Rack Base

COLOR: G

FEATURES:

- Quality constructed in heavy-duty 22 gauge Galvanized Steel for durability and longevity.
- Has removable channels to accommodate filters from 1 to 4 inch in updraft and downdraft installations.

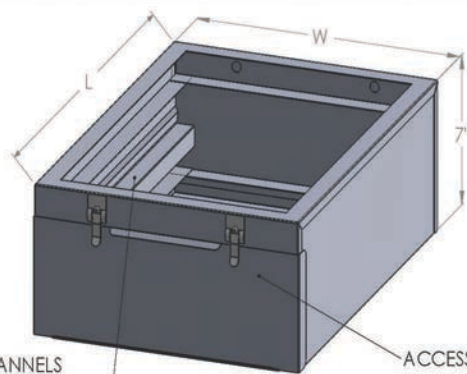

REMOVABLE CHANNELS
TO ACCOMMODATE 1" - 4"
FILTERS IN UPDRAFT OR
DOWNDRAFT INSTALLATIONS.

HEAVY 22GA. GALVANIZED
CONSTRUCTION

ACCESS DOOR FOR FILTER

Size	WH	
1420	14 3/82	0 1/8
1425	14 3/82	5 1/8
1620	16 3/82	0 1/8
1625	16 3/82	5 1/8
1820	18 3/8	20 1/8
1825	18 3/8	25 1/8
20201	20 3/8	20 1/8
20251	20 3/8	25 1/8



REDUCE ♣ REUSE ♣ RECYCLE



There is an ongoing effort at FAMCO® to always improve our utilization and reduce our scrap. On average, FAMCO® recycles approximately 113,000 pounds of metal per month. We believe that one of the best ways to minimize our environmental footprint is by thinking green so these products may be reduced, recycled, and repurposed for something new.

TERMS OF SALE

DISCOUNTS

Discounts offered by FAMCO® are for approved accounts only. Discounts are a percentage off list price from list price book. All special orders are priced net and receive no discounts. FAMCO® will not accept returns of special ordered products.

TERMS

Terms are NET 30 days from date of invoice. Payment to be made to FAMCO®, 5450 E. Franklin Road, Suite 104, Nampa, ID 83687. There will be an interest charge of 1½% per month (18% APR) added on all accounts over 30 days. FAMCO® reserves the right to change prices without notice.

DELIVERY TERMS

FREIGHT

All orders should try to reach freight free minimums if possible. All orders below freight free minimums will be prepaid and added to invoice unless specified otherwise. See page 78 for freight allowances

ROUTING

Orders will be shipped the most cost effective way. Any additional freight cost over standard routing will be invoiced to the customer. We cannot be liable for shipping delays not within our control.

GUARANTEE

All products are guaranteed to be free of defective material or workmanship for a period of one year from date of delivery. During the guarantee period, if any parts prove defective, they will be repaired or replaced free of charge at factory option; if, upon receipt of written authorization they are delivered prepaid to the factory. This guarantee does not, however, cover any damage caused by neglect of lubrication, accident or overload, improper installation, nor does it cover the cost of repairs made or attempted outside the factory without written authorization from FAMCO®. Correction of any verified defects by repair or replacement shall constitute fulfillment of the guarantee. Customer must pay all freight cost associated with repair or replacement.

ERRORS & OMISSIONS

While every effort has been made to ensure the accuracy of the information supplied herein, FAMCO® (Fresh Air Manufacturing Company) cannot be held responsible for any errors or omissions.

ORDERING INFORMATION



CATALOG

Please use our catalog numbers and description when ordering to avoid confusion or delay.



MATERIALS

Please contact us for all special material requests.



BIDS & QUOTES

All price quotes are good for a maximum of 30 days unless stated otherwise in writing.



MISCELLANEOUS

Extra catalogs, price sheets, ad materials and samples will be provided at the option of FAMCO®.



ORDER ONLINE



SECURE ONLINE
PAYMENT OPTIONS
AVAILABLE



COMPLETE AND
ON TIME



GUARANTEE



QUALITY VENTILATION SOLUTIONS SINCE 1989

WHOLESALE PORTAL NOW LIVE

SIGN UP BY EMAILING OUR TEAM AT WEBPORTAL@FAMCOMFG.COM

LEARN MORE ABOUT THE LATEST PRODUCTS BY FOLLOWING US ON




RETURN POLICY

FAMCO® will consider taking back product that is current and has been purchased within 12 months of the date of request. The customer is responsible for all freight charges to return the product, and there is a 25% restocking fee for all returned product. Credit will not be issued until product is returned and inspected. Product must arrive in original packaging, and in clean and resalable condition. Credits will expire 1 year from date of issue and will no longer be honored. FAMCO®

will issue a Return Authorization (RA) for all returns and it must accompany the product. No return will be accepted without an RA. The RA's are good for a maximum of 30 days. If the product is not returned within that time frame a new RA must be requested. For damaged product, FAMCO® will need pictures of the damage to determine if we will need it returned for credit. An RA will be issued for the return.

FREIGHT CLAIMS

All claims must be reported to FAMCO® within 2 weeks of delivery. If product is missing or damaged in shipment, it must be noted on the delivery receipt (BOL) prior to the freight truck departure. If you do not have time to count while the driver is there, please note on the delivery receipt **"subject to count"**. Without this information on the delivery receipt, we will no longer be able to issue a credit for missing products. It is the responsibility of the customer to file freight claims with the carrier.

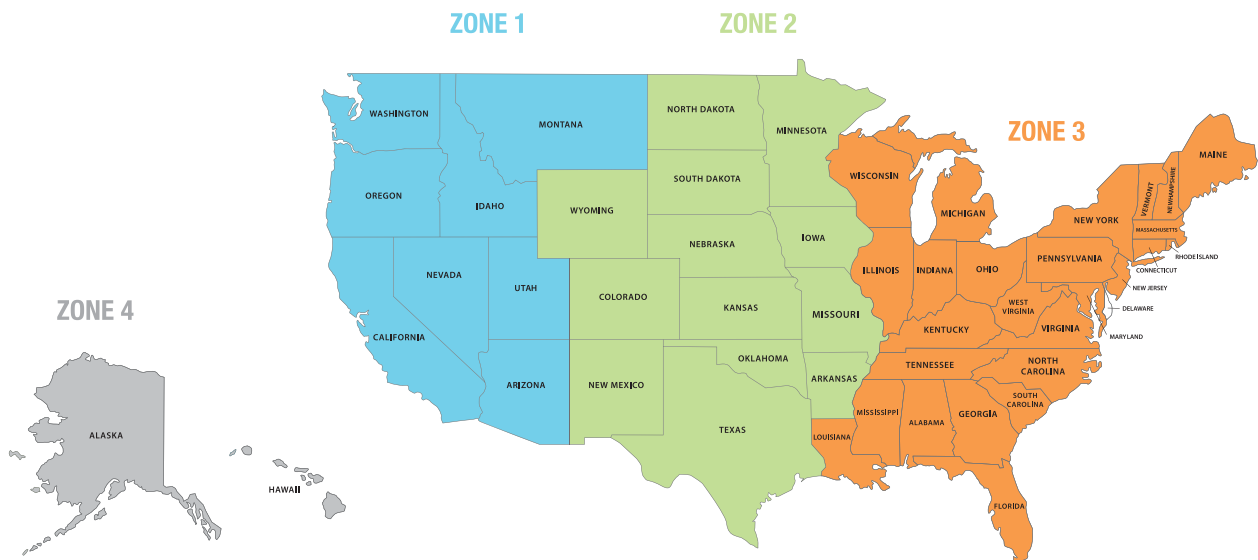

FREIGHT FREE ALLOWANCES

ZONE #1\$1,500

ZONE #2\$2,000

ZONE #3\$2,500

ZONE #4F.O.B. Nampa, ID

(ZONE 4-Includes AK, HI, & Canada)

*SOME RESTRICTIONS APPLY

**EXCLUDES OVERSIZED PALLETS AND SPECIAL ORDERS





5450 E Franklin Rd. Suite #104
Nampa, ID 83687

P: 208-884-8931
TF: 800-234-1903
F: 208-884-8943

www.famcomfg.com
sales@famcomfg.com